

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
1 November 2001 (01.11.2001)

PCT

(10) International Publication Number  
**WO 01/82260 A2**

- (51) International Patent Classification<sup>7</sup>: **G08C**
- (21) International Application Number: **PCT/US01/12766**
- (22) International Filing Date: **19 April 2001 (19.04.2001)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:  
**09/559,983** **26 April 2000 (26.04.2000)** **US**
- (71) Applicant: **AMERICAN POWER CONVERSION**  
[US/US]; 132 Fairgrounds Road, West Kingston, RI 02892 (US).
- (72) Inventors: **HAMMOND, Brad**; 104 Hideaway Lane, North Kingstown, RI 02852 (US). **MEISER, Carl, J., III**; 9 Flintstone Court, East Greenwich, RI 02818 (US).

**GIAQUINTO, Todd**; 50 Cattail Lane, North Kingstown, RI 02852 (US). **MURPHY, Catherine**; Apartment 24306, 3595 Post Road, Warwick, RI 02886 (US). **REDMOND, Dan**; 23 Church Street, Bradford, RI 02808 (US).


(74) Agent: **KLAUZINSKI, Robert, V.**; Mintz, Levin, Cohn, Ferris Glovsky and Popeo, P.C., One Financial Center, Boston, MA 02111 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,

[Continued on next page]

(54) Title: **SYSTEM AND METHOD FOR MANAGING UNINTERRUPTIBLE POWER SUPPLY SYSTEMS**

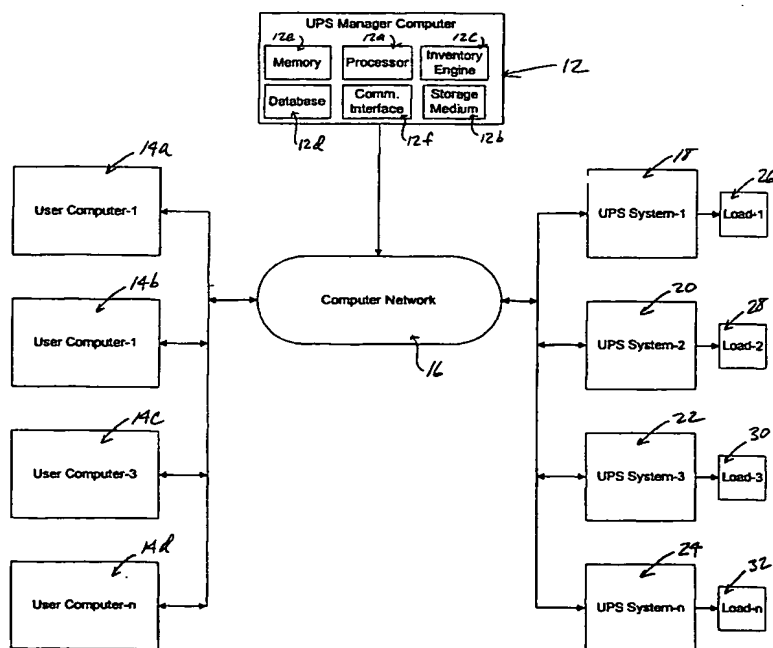

(57) Abstract: An Internet-based system and method is set forth for managing a number of uninterruptible power supply systems. The system includes an uninterruptible power supply manager computer coupled to a number of user computers via a computer network. The manager computer is further coupled to the number of uninterruptible power supply systems via the computer network. The manager computer can communicate with the number of uninterruptible power supply systems to obtain inventory and/or status information related to each of the uninterruptible power supply systems. The inventory and/or status information is contained in a database defined on the manager computer. An inventory engine, which is included in the computer manager, can configure and arrange the inventory and/or status information into a number of reports.

WO 01/82260 A2



IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

- *without international search report and to be republished upon receipt of that report*

## SYSTEM AND METHOD FOR MANAGING UNINTERRUPTIBLE POWER SUPPLY SYSTEMS

### FIELD OF THE INVENTION

5           The present invention relates generally to a system and method for managing a number of uninterruptible power supply systems, and more specifically to a system and method for managing a number of uninterruptible power supply systems based on inventory and/or status information related to each uninterruptible power supply system.

10

### BACKGROUND

          The use of uninterruptible power supply ("UPS") systems having battery back-up systems to provide regulated, uninterrupted power for sensitive and/or critical loads, such as computer systems, and other data processing systems is well known.

15       Today there are many thousands of these UPS systems in operation. Many of these UPS systems require preventative maintenance, such as battery inspections and/or replacement, to avoid system failures. Technicians ordinarily visit a site, where a UPS system resides, to obtain status information related to the UPS system and to perform system inspection and maintenance. A particular business or industry may

20       have a number of sites residing throughout the country and each site may employ a number of UPS systems. Thus, it can be logistically impractical for a technician to maintain and inspect these UPS systems which reside at numerous sites throughout the country. In some circumstances, a UPS system failure can occur during the interim between scheduled UPS system inspection and maintenance. A UPS system

25       failure can be particularly catastrophic where the UPS system is protecting one or more critical computer systems, the loss of power to which can result in unrecoverable data loss.

          Therefore, an unsolved need remains for a system and method for managing a number of UPS systems that overcomes the above described limitations and

30       deficiencies of the prior art.

SUMMARY OF THE INVENTION

5

In accordance with principles of the present invention, a system for managing a number of UPS systems comprises a UPS manager computer coupled to a number of user computers via an internet-based computer network system. The manager computer is further coupled to the number of UPS systems via the computer network  
10 system. The manager computer can communicate with the number of UPS systems, via the computer network system, to obtain inventory and/or status information related to each of the UPS systems.

In an embodiment of the present invention, the manager computer comprises a processor, a storage medium and a database which can be defined on the storage  
15 medium. The database can contain the inventory and/or status information related to each of the UPS systems. The manager computer further comprises an inventory engine. The inventory engine can configure and arrange the inventory and/or status information contained in the database into a number of reports.

In another embodiment of the present invention, a method for managing a  
20 number of UPS systems comprises steps of providing a user personal identification number from one or more user computers to a manager computer; establishing a communication link between one or more of the user computers and the manager computer based on the user personal identification number; requesting the manager computer to provide a UPS system status; electing to configure a database; electing a  
25 number of internet-protocol addresses and entering the number of internet-protocol addresses in predetermined address fields, the internet-protocol addresses being associated with the number of UPS systems; requesting the manager computer to obtain inventory and/or status information related to each UPS system associated with each internet-protocol address; and storing the inventory and/or status information in  
30 the database defined on the manager computer.

The method of managing a number of UPS systems may further include a step of configuring and arranging the inventory and/or status information, which is defined in the database, into a number of reports.

5

#### BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing and other objects of this invention, the various features thereof, as well as the invention itself, may be more fully understood from the following description, when read together with the accompanying drawings in which:

10

Fig. 1a is a schematic block diagram of a system in accordance with one embodiment of the present invention;

Fig. 1b is an exploded schematic block diagram of a portion of the system shown in Fig. 1a;

15

Fig. 2a is a flow chart showing process steps executable on the system shown in Fig. 1a;

Fig. 2b is a flow chart providing additional process steps for the flow chart shown in Fig. 2a;

20

Fig. 2c is a flow chart providing additional process steps for the flow chart shown in Fig. 2a;

Fig. 3 is an exemplary system Status Web-page;

Fig. 4a is an exemplary Device List Web-page with a Single IP address tab selected;

25

Fig. 4b is a range IP address tab opened from the Device List Web-page shown in Fig. 4a;

Fig. 4c is a subnet IP address tab opened from the Device List Web-page shown in Fig. 4a;

Fig. 4d is an exemplary SNMP Settings Web-page;

Fig. 5 is an exemplary Update Now Web-page;

30

Fig. 6 is an exemplary Schedule Updates Web-page;

Fig. 7 is an exemplary Inventory Report including UPS model information;

Fig. 8 is another exemplary Inventory Report including detailed information for one of the UPS model families shown in Fig. 7;

Fig. 9 is another exemplary Inventory Report including location information;

Fig. 10 is another exemplary Inventory Report including UPS location details  
5 for one of the UPS locations described in Fig. 9;

Fig. 11 is another exemplary Inventory Report including IP address information;

Fig. 12 is another exemplary Inventory Report including UPS age information;

Fig. 13 is another exemplary Inventory Report including detailed information  
10 for UPS systems defined in one of the predetermined age ranges shown in Fig. 12;

Fig. 14 is another exemplary Inventory Report including device unavailability information;

Fig. 15 is an exemplary Battery Status Report including self-test results;

Fig. 16 is another exemplary Battery Status Report including detailed  
15 information of one of the self-test groups shown in Fig. 15;

Fig. 17 is another exemplary Battery Status Report including bad battery indicator information;

Fig. 18 is another exemplary Battery Status Report including load information;

Fig. 19 is an exemplary Battery Status Report including UPS load details for  
20 the report shown in Fig 18; and

Fig. 20 is another exemplary Battery Status Report including runtime remaining information.

#### DETAILED DESCRIPTION

25 Embodiments of the present invention are described herein with reference to an Internet-based system and method for managing a number of UPS systems. However, as understood by one skilled in the art, the present invention is not limited to Internet-based systems and may include systems employing other computer networks as well as stand-alone systems.

30 Fig. 1a shows a system 10 for managing a number of UPS systems or devices in accordance with one embodiment of the present invention. The system 10 includes

a UPS manager computer 12 coupled to a number of user computers, 14a, 14b, 14c and 14d, via a computer network 16 such as the Internet. The UPS manager computer 12 is further coupled to a number of UPS systems 18, 20, 22 and 24, via the computer network 16. The user computers 14a, 14b, 14c and 14d, can be conventional personal computers and/or workstations. Each of the user computers 14a, 14b, 14c and 14d includes conventional hardware and software that permit communication with the UPS manager computer 12 via the computer network 16. The UPS systems 18, 20, 22 and 24 provide regulated uninterruptible power to loads 26, 28, 30 and 32 respectively.

The UPS manager computer 12 can comprise a conventional computer server such as an "NT-Server" or "NT Workstation". These computer servers may be programmed with conventional server software such as: "Windows Explorer", "Netscape Enterprise", or "Navigator." Furthermore, these computer servers may be programmed with conventional Web page interface software such as: "Visual Basic", "Java", "JavaScript", "HTML/DHTML", "C++", "J++", "Perlscript", or "ASP".

In an embodiment of the present invention and as shown in Fig. 1a, the UPS manager computer 12 is an NT-Server. The NT-server includes a processor 12a, storage medium 12b, such as a magnetic disk drive, inventory engine 12c, database 12d, memory 12e and communication interface 12f. The inventory engine 12c can communicate with the number of UPS systems, via the communication interface 12f, to obtain inventory and/or status information related to each UPS system. The inventory and/or status information received from each UPS system can be stored in the database 12d defined on the UPS manager computer 12. The inventory engine 12c can further configure and arrange the inventory and/or status information, which is stored in the database 12d, into a number of reports.

In an embodiment of the present invention, the inventory and/or status information received from the UPS systems 18, 20, 22 and/or 24, and stored in the database 12d can include: UPS model, UPS location, UPS internet protocol ("IP") address, UPS age, UPS battery age and/or UPS availability. The database 12d can further store battery status information including, but not limited to: battery self test

results, replace battery status, battery status by load and/or battery status by runtime remaining.

Each of the UPS systems 18, 20, 22 and 24, can be a conventional UPS system. In an embodiment of the present invention, UPS systems provided by  
5 American Power Corporation, of Kingston, Rhode Island, which are sold under the trade names Smart-UPS, Symmetra, Silicon, and Matrix, can be used as UPS systems 18, 20, 22 and 24.

Fig. 1b shows an exploded view of the UPS system 18 shown in Fig. 1a. As shown in Fig. 1b, the UPS system 18 includes an input filter/surge protector 18a, a  
10 transfer switch 18b, a controller 18c, a battery 18d, a battery charger 18e, an inverter 18f, and a DC-DC converter 18g. The UPS system 18 also includes an input 18h for coupling to an AC power source (not shown) and an outlet 18i for coupling to the load 26. A memory device 18j and communication interface 18k are also included in the UPS system 18. The memory device can be used to store the inventory and/or status  
15 information as well as other diagnostic information related to the UPS system 18. The communication interface 18k is configured and arranged to enable bi-directional communication between the UPS system 18 and the UPS manager computer 12 via the computer network 16.

In operation of the UPS system 18, the filter/surge protector 18a receives input  
20 AC power from the AC power source through the input 18h, filters the input AC power and provides filtered AC power to the transfer switch 18b and the battery charger 18e. The transfer switch 18b receives the AC power from the filter/surge protector 18a and also receives AC power from the inverter 18f. The controller 18c determines whether the AC power available from the filter/surge protector is within  
25 predetermined tolerances, and if so, controls the transfer switch to provide the AC power from the filter/surge protector 18a to the outlet 18i. If the AC power from the rectifier is not within the predetermined tolerances, which may occur because of "brown out," "high line," or "black out" conditions, or due to power surges, then the controller 18c controls the transfer switch 18b to provide the AC power from the  
30 inverter 18f. The DC-DC converter 18g is an optional component that converts the output of the battery 18d to a voltage that is compatible with the inverter 18f.



Depending on the particular inverter 18f and battery 18d used, the inverter 18f may be operatively coupled to the battery 18d either directly or through a DC-DC converter 18g.

The controller further provides the memory 18j with system status  
5 information, such as the length of time the outlet 18i has been supplied by the battery 18d, as well other related information. The memory 18j stores the system status information as well as inventory data initially programmed into memory 18j by the manufacturer of the UPS system. The communication interface 18k can communicate with the memory 18j to obtain the inventory and/or system status information. The  
10 inventory and/or system status information can be further communicated to the UPS manager computer 12 via computer network 16 for further processing.

Referring further to Figs. 1a, 2a and 3, a method 100 for using the system 10 for managing the number of UPS systems 18, 20, 22 and 24, in accordance with embodiments of the present invention comprises the steps of establishing a  
15 communication link between a manager computer 12 and one or more of the user computers 14a, 14b, 14c, or 14d, which are operated by a user. The UPS manager computer 12 can thereafter present one or more of the user computers 14a, 14b, 14c, or 14d with a personal identification number ("PIN") dialog box (not shown). At step  
20 105 of Fig. 2a, the user can enter a predetermined PIN into the PIN dialog box. After the PIN is validated, the user can be granted access to the manager computer 12. The user's PIN is associated with predetermined user information previously stored in the computer manager 12 which enables the computer manger to identify a particular user and grants that user access to the UPS manager computer 12.

After granting one or more of the user computers 14a, 14b, 14c or 14d access  
25 to the UPS manager computer 12, the user thereof can request the manager computer, at step 110 of Fig. 2a, to provide the user computer 14a, 14b, 14c or 14d, with a Status Web-page and Main Menu. Fig. 3 shows a Status Web-page 400 and the Main Menu 400a used in one embodiment of the present invention. The user can elect to  
30 configure an inventory and/or status information database 12d at step 120 of Fig. 2a, by selecting the Configuration tab of the Main Menu 400a.

Referring to Figs. 1a, 2a, 2c and 4a, 4b, 4c and 4d, in selecting the Configuration tab (Fig. 3), the user is provided with a Configuration Menu 500j as shown in Fig 4a. At step 125a of Fig. 2c, the user can select the Simple Network Management Protocol ("SNMP") Settings tab from the Configuration Menu 500j to generate an SNMP Settings Web-page 550 as shown in Fig. 4d. In the SNMP Settings Web-page 550, the user can choose to add or modify their SNMP network parameters as well as their SNMP read community string prior to adding devices to the device list 500h shown in Fig. 4a.

More specifically, the user can modify their SNMP read community string, at step 125b of Fig. 2c, by entering a predetermined read community name, such as "public" (default name), in the Read Community Name dialog box 550a. The predetermined read community name enables the UPS manager computer 12 to communicate with UPS systems 18, 20, 22 and/or 24 that have been configured with the predetermined read community name. For example, if a number of UPS systems 18, 20, 22 and/or 24 are previously configured with the term "public" as a read community name and the Read Community Name dialog box 550a in the SNMP Settings Web-page 550 is also configured with the term "public", then the UPS manager computer 12 can communicate, via SNMP, with the UPS systems 18, 20, 22 and/or 24 which have been similarly configured. On the other hand, if the UPS manager computer 12 communicates with UPS systems 18, 20, 22 and/or 24 which are configured with another read community name, then the Read Community Name dialog box 550a in the SNMP Settings Web-page 550 can be changed by the user to mirror the other read community name. Thereafter, the UPS manager computer 12 can communicate with the UPS systems 18, 20, 22 and/or 24 which are configured with the other read community name.

The Timeout Value drop-down list 550b enables the user to select a period of time for which the UPS manager computer 12 can attempt to communicate with one or more UPS systems 18, 20, 22 and/or 24 before declaring a failed attempt to communicate therewith.

The Retry Count drop-down list 550c enables the user to select a number of retries the UPS manager computer 12 can attempt in the event that a failed attempt to

communicate between the UPS manager computer 12 and one or more of the UPS system 18, 20, 22 and/or 24 is declared.

With the SNMP settings appropriately configured and at step 125c of Fig. 2c, the user can select the Device List tab from the Configuration Menu 500j to generate a  
5 Device List Web-page 500 as used in one embodiment of the present invention and as shown in Fig. 4a. The Device list Web-page 500 includes a Single tab 500a, a Range tab 500b and a Subnet tab 500c. The user can select anyone of the tabs 500a, 500b or 500c to respectively open a Single IP address dialog box 500d, Range IP address dialog box 500e and Subnet IP dialog box 500f. At step 130 of Fig. 2a, the user can  
10 elect to enter a single IP address by selecting, at step 140 of Fig. 2a, the Single tab from the Device List menu 500. In the Single IP address dialog box 500d and at step 150 of Fig. 2a, the user can enter the single IP address in the dialog box 500d. The single IP address, which is entered into the dialog box 500d, is associated with a computer network address for a single UPS system 18, 20, 22 or 24. After entering the  
15 single IP address into the dialog box 500d and selecting an Apply button 500g, the single IP address will be added to the IP address inventory list 500h.

Alternatively, at step 160 of Fig. 2a, the user can elect to add a contiguous range of IP addresses to the IP address inventory list 500h. The contiguous range of IP addresses is defined by a starting IP address and an ending IP address. At step 170 of  
20 Fig. 2a, the user can select the Range tab 500b from the Device List Web-page 500 to open the Range IP address dialog box 500e as shown in Fig. 4b. At step 180 of Fig. 2a, the user can enter the starting IP address and the ending IP address in the Range IP dialog box 500e. After the user enters the starting and ending IP addresses into the Range IP dialog box 500e, the user can select the Apply button 500g to add all  
25 contiguous IP addresses, which are defined between the starting and ending addresses, to the IP address inventory list 500h. Prior to adding the entered range of contiguous IP addresses to the inventory list 500h, the Device List Web-page 500 will compare the entered range of IP address's to the existing IP address inventory list 500h looking for and discarding duplicate entries. The Device List Web-page will then present the  
30 remaining range of IP addresses to the user for approval. If the user approves the presented range of IP addresses, the computer manager 12 will strobe UPS systems

18, 20, 22 and 24 associated with the approved range of IP addresses to validate the addresses. The validated IP addresses are subsequently stored in the inventory list 500h.

If one or more IP addresses associated with UPS systems are unknown, the user can elect to search for IP addresses at step 190 of Fig. 2a. At step 200 of Fig. 2a, the user can search for the IP addresses by selecting the Subnet tab 500c from the Device List menu 500 shown in Fig. 4a to open the Subnet menu 500f shown in Fig. 4c. At step 210 of Fig. 2a, the user can enter a partial IP address followed by a wildcard symbol, such as an asterisk, in the Subnet menu 500f. After selecting the Apply button 500g from the Subnet dialog box 500f, the Device List Web-page will compare the entered IP addresses to the existing IP address inventory list 500h, looking for and discarding duplicate entries. The Device List Web-page will then present the remaining list of IP addresses to the user for approval. If the user approves the presented list of IP addresses, the computer manager 12 will strobe UPS systems 18, 20, 22 and 24 associated with the approved list of IP addresses to validate the addresses. The validated IP addresses are subsequently stored in the inventory list 500h.

After generating the IP address inventory list 500h, the manager computer 12 can communicate with one or more of the UPS systems 18, 20, 22 or 24 defined at the addresses to obtain inventory and/or status information therefrom. The inventory and/or status information can be stored in the database 12d of the computer manager 12 for subsequent use in generating reports.

Referring to Figs. 1a, 2a and 5, at step 220 of Fig. 2a and from the Device List Web-page 500 (Fig. 4a), the user can elect to update the database 12d by selecting the Update Now tab from the System Menu 500i. Selecting the Update Now tab from the System Menu 500i opens an Update Now Web-page. Fig. 5 shows an Update Now Web-page 600 in accordance with an embodiment of the present invention. At step 230 of Fig. 2a, the user can update the inventory and/or status information contained in the database 12d by selecting an Update Now button 600a which is defined on the Update Now Web-page 600 as shown in Fig. 5. After selecting the Update Now button 600a, the computer manager 12 will concomitantly communicate with one or

more of the UPS systems 18, 20, 22 and/or 24, which are associated with IP addresses defined in the IP address inventory list 500h (Fig. 4a). In communicating with the UPS systems 18, 20, 22 and/or 24, the manager computer 12 can receive and update the database 12d with updated inventory and/or status information related to each UPS system 18, 20, 22 and/or 24, at step 240 of Fig. 2a.

Alternatively and referring further to Fig. 6, the user can elect at step 250 of Fig. 2a, to schedule a database 12d update at a later time by selecting, at step 260 of Fig. 2a, the Schedule Updates tab from the Configuration Menu 500j. Selecting the Schedule Updates tab from the Configuration Menu 500j from the Device List Web-page 500 opens a Schedule Updates Web-page. Fig. 6 shows an embodiment of a Schedule Updates Web-page 700 in accordance with an embodiment of the present invention. In the Schedule Updates Web-page 700 and at step 270 of Fig. 2a, the user can enter a database 12d update cycle or number of database 12d updates that occur in a given period of time. Moreover, the user can select the day and time that the database 12d updates can occur. In maximizing the number of database 12d updates that occur in a given period of time and generating reports from the updated database 12d information, the user can minimize the time interval for which the UPS systems 18, 20, 22 and/or 24 are left unattended. Further, minimizing the time interval for which the UPS systems 18, 20, 22 and/or 24 are left unattended also minimizes failures thereof.

The user can elect to generate a number of reports at step 280 of Fig. 2a, by selecting the Reports tab, at step 290 of Fig. 2b, from any one of the following: Status Web-page 400, Device List Web-page 500, Update Now Web-page 600, or Schedule Updates Web-page 700 (Figs. 3 through 6 respectively). In electing the Reports tab, the user is provided with a Reports menu 700a. At step 300 of Fig. 2b, the user can elect the Inventory tab from the Reports menu 700a. At step 310 of Fig. 2b, the user can select from and generate any one of a number of predetermined inventory reports. Alternatively and at step 320 of Fig. 2b, the user can elect the Battery Status tab from the Reports menu 700a. At step 330 of Fig. 2b, the user can select from and generate any one of a number of predetermined battery status reports. The inventory reports can include UPS model, UPS location, UPS internet protocol ("IP") address, UPS age,

UPS battery age and/or UPS availability. The battery status reports can include: Battery Self-test Results, Replace Battery Status, Battery Status by Load and/or Battery Status by Runtime Remaining.

Fig. 7 is an exemplary Inventory Report 800 including UPS model information which is generated in accordance with step 310 of Fig. 2b. The Inventory Report 800 further includes a number of UPS model families and associated quantities of UPS systems defined in each model family. Any one of the model families can be selected which generates another report containing detailed information associated with the selected model family as shown in Fig. 8.

Fig. 8 is another exemplary Inventory Report 900 including detailed information for one of the UPS model families shown in Fig. 7. The detailed information can include, Domain Name Service (DNS) name, Serial No., UPS Model, Contact and Location of the UPS.

Fig. 9 is another exemplary Inventory Report 1000 including location information which is generated in accordance with step 310 of Fig. 2b. The Inventory Report 1000 further includes a number of bar graphs that describe the quantity of UPS systems residing at a predetermined location. Any one of the bar graphs can be selected which generates another report containing detailed UPS location information as shown in Fig. 10.

Fig. 10 is another exemplary Inventory Report 1100 including UPS location details for one of the UPS locations described in Fig. 9. The location details can include, DNS name, Serial No., UPS Model, Contact, IP Address, UPS Name and Firmware Revision.

Fig. 11 is another exemplary Inventory Report 1200 including IP Address information, which is generated in accordance with step 310 of Fig. 2b. The Inventory Report 1200 can further include, DNS Name, UPS Model, UPS Name, UPS Serial No. and UPS Firmware Revision.

Fig. 12 is another exemplary Inventory Report 1300 including UPS Age information which is generated in accordance with step 310 of Fig. 2b. The Inventory Report 1300 groups a number of UPS systems in a predetermined UPS age range. For example, age ranges can include: UPS systems between 0 and 1 year old; UPS

systems between 1 and 2 years old; UPS systems between 2 and 3 years old; UPS systems between 3 and 4 years old; UPS systems between 4 and 5 years old and UPS systems of unknown age. UPS systems defined in any one of the number of predetermined age ranges can be selected which generates another report containing  
5 detailed information associated with UPS systems defined in the selected age range as shown in Fig. 13.

Fig. 13 is another exemplary Inventory Report 1400 including detailed information for UPS systems defined in one of the predetermined age ranges shown in Fig. 12. The detailed information can include, UPS Model, Serial No., Firmware  
10 Revision, DNS name, Contact, Location, IP Address, Battery Last Replacement Date and UPS Manufacture Date.

Fig. 14 is another exemplary Inventory Report 1500 including device unavailability information which is generated in accordance with step 310 of Fig. 2b. The unavailability information identifies UPS systems that failed to respond to the  
15 most recent data update executed by the UPS manager computer. As a result of the failure to respond to the aforementioned data update operation, information included in the UPS unavailability report is only valid as of the most recent successful data update executed by the UPS manager computer.

Fig. 15 is an exemplary Battery Status Report 1600 including self-test results  
20 which are generated in accordance with step 330 of Fig. 2b. The Fig. 15 report groups UPS systems by the self-tests results communicated to the UPS manager computer during the most recent data update. The self-test result groups can include: Failed, Passed and Unknown. Any one of the self-test groups can be selected to generate another report containing detailed information related to UPS systems defined in the  
25 selected self-test group as shown in Fig. 16.

Fig. 16 is another exemplary Battery Status Report 1700 including detailed information of one of the self-test groups shown in Fig. 15. The detailed information defined in the self test group can include: Self-test Date, UPS Model, Serial No.,  
30 Battery Status, DNS name, Contact, Location, IP Address, Battery Last Replacement Date, UPS Manufacture Date and Firmware Revision.

Fig. 17 is another exemplary Battery Status Report 1800 including bad battery indicator information which is generated in accordance with step 330 of Fig. 2b. The Battery Status Report 1800 identifies and describes one or more UPS systems, which communicated to the UPS manager computer during the most recent update, that its battery needs to be replaced. The Battery Status report can further include other UPS system related information similar to that described above and as shown in Fig. 17.

Fig. 18 is another exemplary Battery Status Report 1900 including load information which is generated in accordance with step 330 of Fig. 2b. The Battery Status Report 1900 groups UPS systems according to a percentage of full load operation. This percentage of full load operation is communicated by each UPS system to the UPS manager computer during each update. Each UPS system can be assigned to a group in accordance with this percentage of full load operation, which is communicated to the UPS manager computer. The groups can include percentage of full operation ranges from approximately: 0% to 10%; 10% to 20%; 20% to 30%; 30% to 40%; 40% to 50%; 50% to 60%; 60% to 70%; 70% to 80%; 80% to 90%; 90% to 100% and Overload as shown in Fig. 18. Any one of the percentages of full operation ranges or groups can be selected to provide another report including UPS load details as shown in Fig. 19.

Fig. 19 is an exemplary Battery Status Report 2000 including UPS load details for one of the groups shown in Fig. 18. In the Battery Status Report 2000, the load details can include: Percentage-Load, Serial No., UPS Model, Firmware Revision, DNS name, Contact, Location, Runtime, IP Address and UPS Name.

Fig. 20 is another exemplary Battery Status Report 2100 including runtime remaining which is generated in accordance with step 330 of Fig. 2b. The Battery Status Report 2100 indicates the amount of runtime remaining for each UPS system at the time of the most recent update by the UPS manager computer. If a UPS system has not been operating on battery recently, then the remaining runtime should be a value equivalent to the maximum available runtime of the UPS system under the load associated with the UPS.

There are many advantages to the present invention including a method and system that enables a user to manage a number of UPS systems from a central location.



the user can dispatch technicians to maintain and inspect a number of UPS based on inventory and/or status information received from each UPS system. The interval between UPS system status updates can be minimized by adjusting inventory and/or status information update cycle. Thus the time interval that the system is left unattended can be minimized, which can also minimize system downtime due to insufficient preventative maintenance or inspections.

Having thus described at least one illustrative embodiment of the invention, alterations, modifications and improvements will readily occur to those skilled in the art. Such alterations, modifications and improvements are intended to be within the scope and spirit of the invention. Accordingly, the foregoing description is by way of example only and is not intended as limiting. The invention's limit is defined only by the following claims and the equivalents thereto.

What is claimed is:

1. An uninterruptible power supply manager for managing a number of  
5 uninterruptible power supply systems coupled to the Internet, the uninterruptible  
power supply manager comprising:

a communication port for communicating over the Internet with the  
uninterruptible power supply systems and a plurality of user computers;

10 wherein the uninterruptible power supply manager computer is constructed  
and arranged to obtain inventory and status information from each uninterruptible  
power supply system over the Internet and to provide at least a subset of the inventory  
and status information to at least one of the user computers over the Internet.

2. The uninterruptible power supply manager of claim 1, further  
15 comprising:

a processor;

a storage medium;

a database defined on the storage medium, the database containing the  
inventory and status information; and

20 an inventory engine, the inventory engine configuring and arranging the  
inventory and status information into a number of reports.

3. A method of managing a number of uninterruptible power supply  
systems, the uninterruptible power supply systems being coupled to an uninterruptible  
25 power supply manager computer via a computer network, the manager computer  
being further coupled to a number of user computers, the method of managing the  
number of uninterruptible power supply systems comprising the steps of:

establishing a communication link between one or more of the user computers  
and the manager computer;

30 requesting the manager computer to provide the user computer with an  
uninterruptible power supply system status Web-page and main menu;

entering a number of internet-protocol addresses in predetermined address fields, each of the internet-protocol addresses being associated with one of the uninterruptible power supply systems;

requesting the manager computer to provide inventory and status information  
5 related to each uninterruptible power supply system associated with each internet-protocol address; and

storing the inventory and status information in a database defined on the manager computer.

10 4. The method of managing a number of uninterruptible power supply systems of claim 3, further comprising the step of configuring and arranging the inventory and status information defined in the database to provide a number of reports.

15 5. The method of managing a number of uninterruptible power supply systems of claim 3, wherein the step of entering a number of internet-protocol addresses in predetermined address fields comprises entering a single internet-protocol address in the predetermined address field.

20 6. The method of managing a number of uninterruptible power supply systems of claim 3, wherein the step of entering a number of internet-protocol addresses in predetermined address fields, comprises:

defining a range of contiguous internet-protocol addresses, the range having a starting internet-protocol address and an ending internet-protocol address; and

25 entering the starting internet-protocol address and the ending internet-protocol address in predetermined address fields, the range of internet-protocol addresses being associated with the number of uninterruptible power supply systems.

30 7. The method of managing a number of uninterruptible power supply systems of claim 3, wherein the step of entering a number of internet-protocol address in predetermined address fields, comprises:

searching for a number internet protocol addresses associated with uninterruptible power supply systems coupled to the computer manager, wherein searching for the number internet protocol addresses comprises:

- 5 (i) entering a partial internet-protocol address in a predetermined address field;
- (ii) strobing the uninterruptible power supply systems associated with the partial internet-protocol address to determine internet-protocol addresses associated with each uninterruptible power supply system; and
- 10 (iii) storing the internet-protocol addresses associated with each uninterruptible power supply system.

8. The method of managing a number of uninterruptible power supply systems of claim 3, further comprising the step of updating the inventory and status information defined in the database.

15

9. The method of managing a number of uninterruptible power supply systems of claim 3, further comprising the step of updating the inventory and status information defined in the database based on a predetermined cyclic schedule.

20

10. The method of managing a number of uninterruptible power supply systems of claim 3, wherein the number of reports include inventory reports.

25

11. The method of managing a number of uninterruptible power supply systems of claim 3, wherein the number of reports include battery status reports.

12. A system for managing a number of uninterruptible power supply systems via an internet-based computer network system, the system for managing the uninterruptible power supply systems comprising:

30 means for responding to a request from a user computer to provide an uninterruptible power supply system status;

means for receiving a number of internet-protocol addresses from the user computer, the internet-protocol addresses being associated with the number of uninterruptible power supply systems;

means for providing inventory and status information to one of the user computers, the inventory and status information being related to each uninterruptible power supply system; and

means for storing the inventory and status information in a database defined on the system.

10           13.    The system for managing a number of uninterruptible power supply systems of claim 12, further comprising means for configuring and arranging the inventory and status information defined in the database to provide a number of reports.

15           14.    The system of managing a number of uninterruptible power supply systems of claim 12, wherein the means for entering a number of internet-protocol addresses in predetermined address fields comprises entering a single internet-protocol address in the predetermined address field.

20           15.    The system of managing a number of uninterruptible power supply systems of claim 12, wherein the means for entering a number of internet-protocol addresses in predetermined address fields, comprises:

              means for defining a range of contiguous internet protocol addresses, the range having a starting internet-protocol address and an ending internet-protocol address;  
25    and

              means for entering the starting internet-protocol address and the ending internet-protocol address in predetermined address fields, the range of internet-protocol addresses being associated with the number of uninterruptible power supply systems.

30

16. The system of managing a number of uninterruptible power supply systems of claim 12, wherein the means for entering a number of internet-protocol addresses in predetermined address fields, comprises:

means for searching a number internet protocol addresses associated with  
5 uninterruptible power supply systems coupled to the computer manager, wherein the means for searching the number internet protocol addresses includes:

(i) means for entering a partial internet-protocol address in a predetermined address field;

(ii) means for strobing the uninterruptible power supply systems  
10 associated with the partial internet-protocol address to determine internet-protocol addresses associated with each uninterruptible power supply system;  
and

(iii) means for storing the internet-protocol addresses associated with each uninterruptible power supply system.

15

17. The system for managing a number of uninterruptible power supply systems of claim 3, further comprising a means for updating the inventory and status information defined in the database.

20 18. The system for managing a number of uninterruptible power supply systems of claim 12, further comprising a means for updating the inventory and status information defined in the database based on a predetermined cyclic schedule.

19. The system for managing a number of uninterruptible power supply  
25 systems of claim 12, wherein the number of reports include inventory reports.

20. The system for managing a number of uninterruptible power supply systems of claim 12, wherein the number of reports include battery status reports.

30

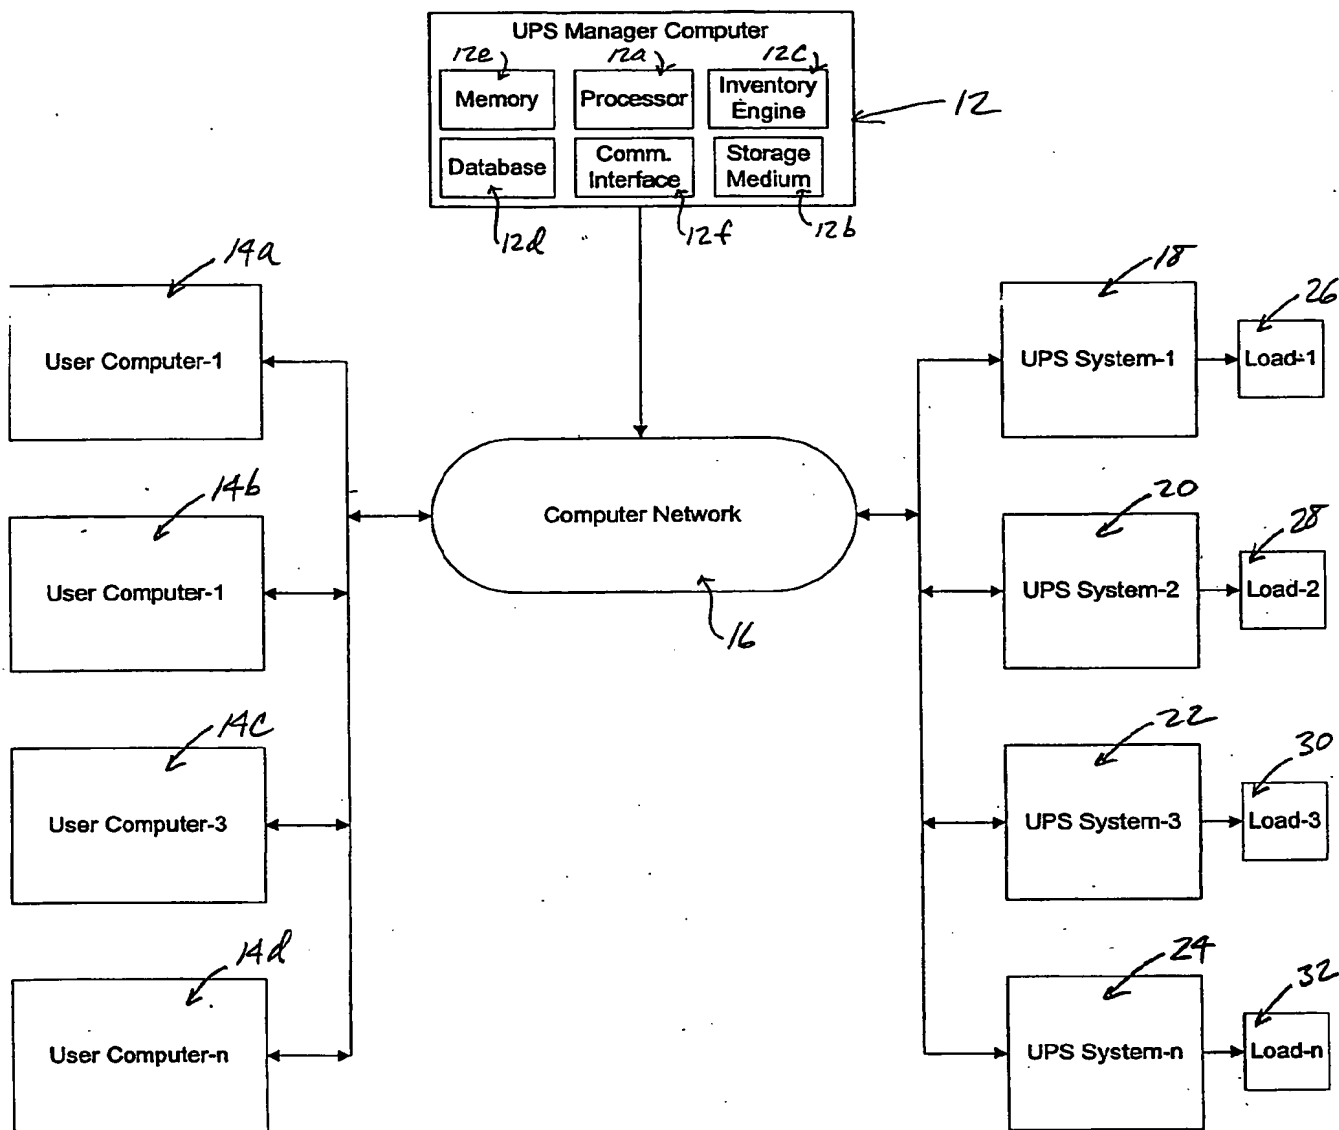


Fig. 1a

10

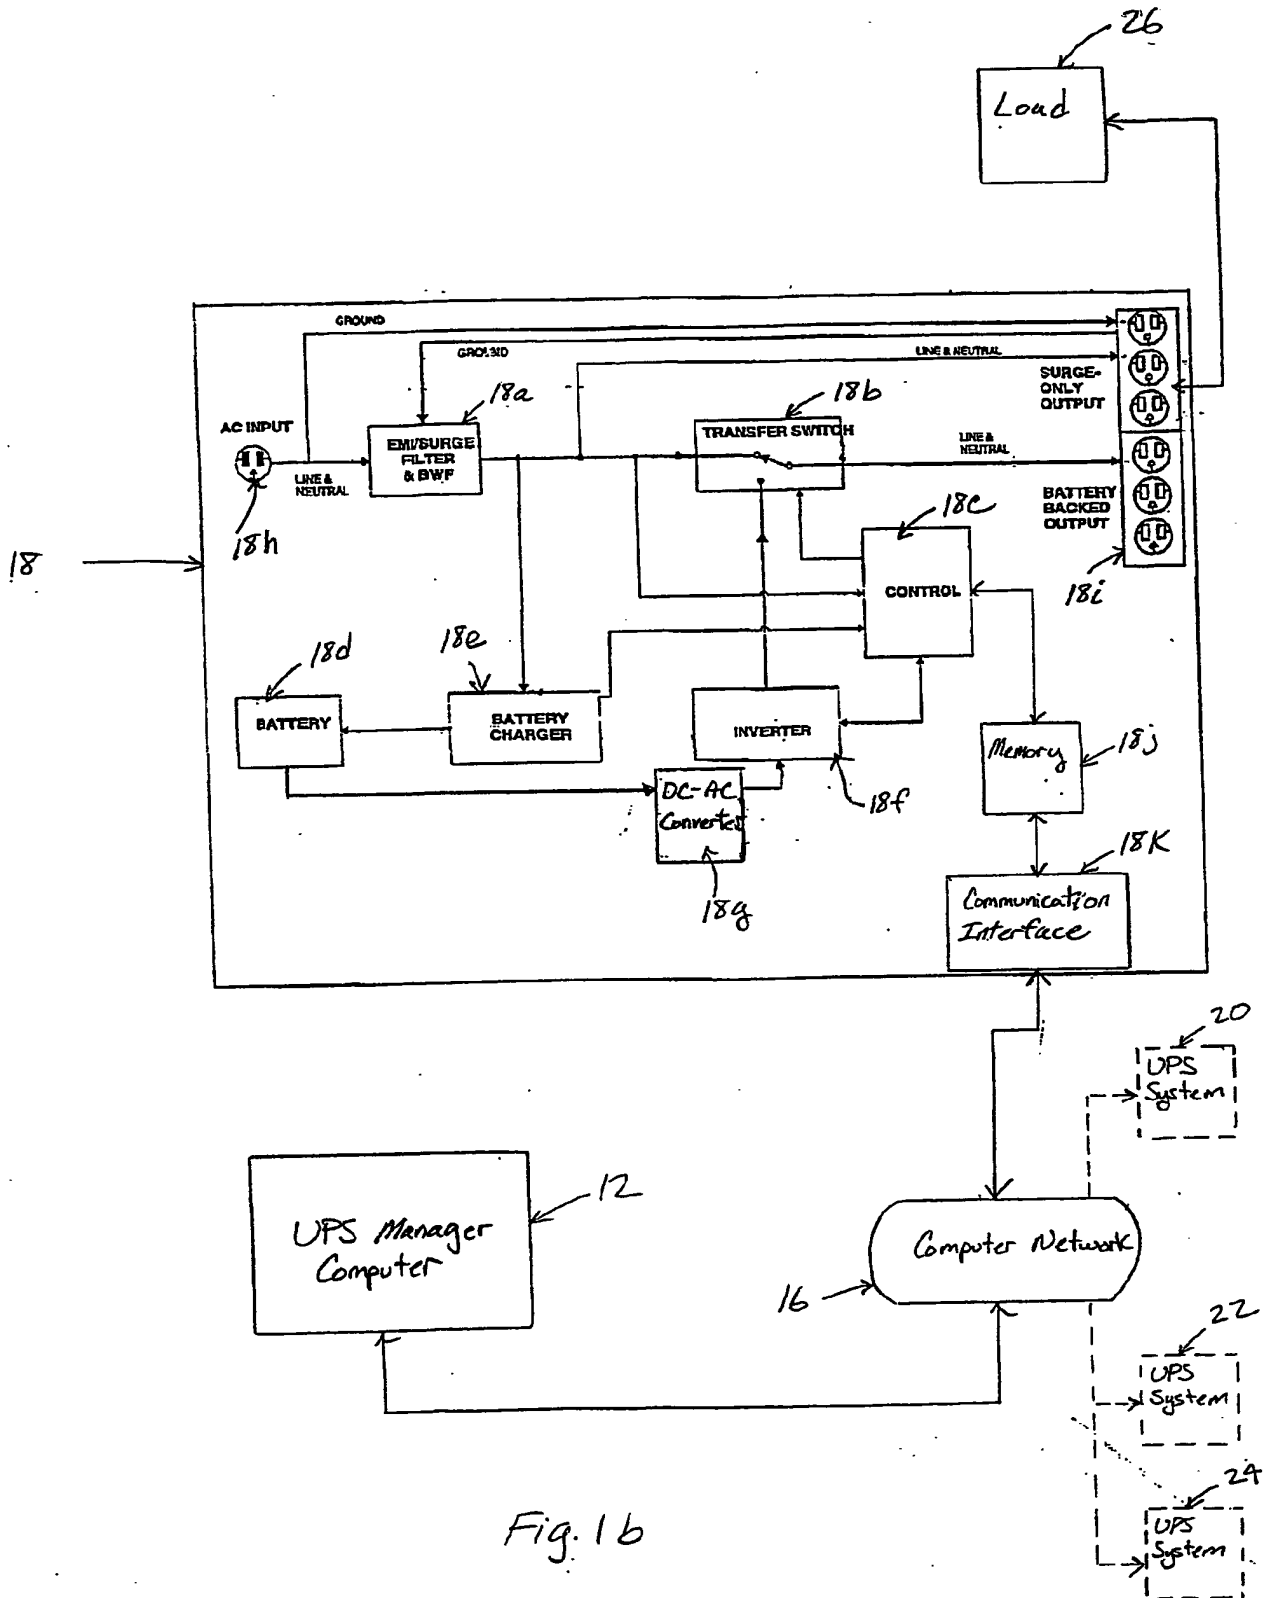


Fig. 1b



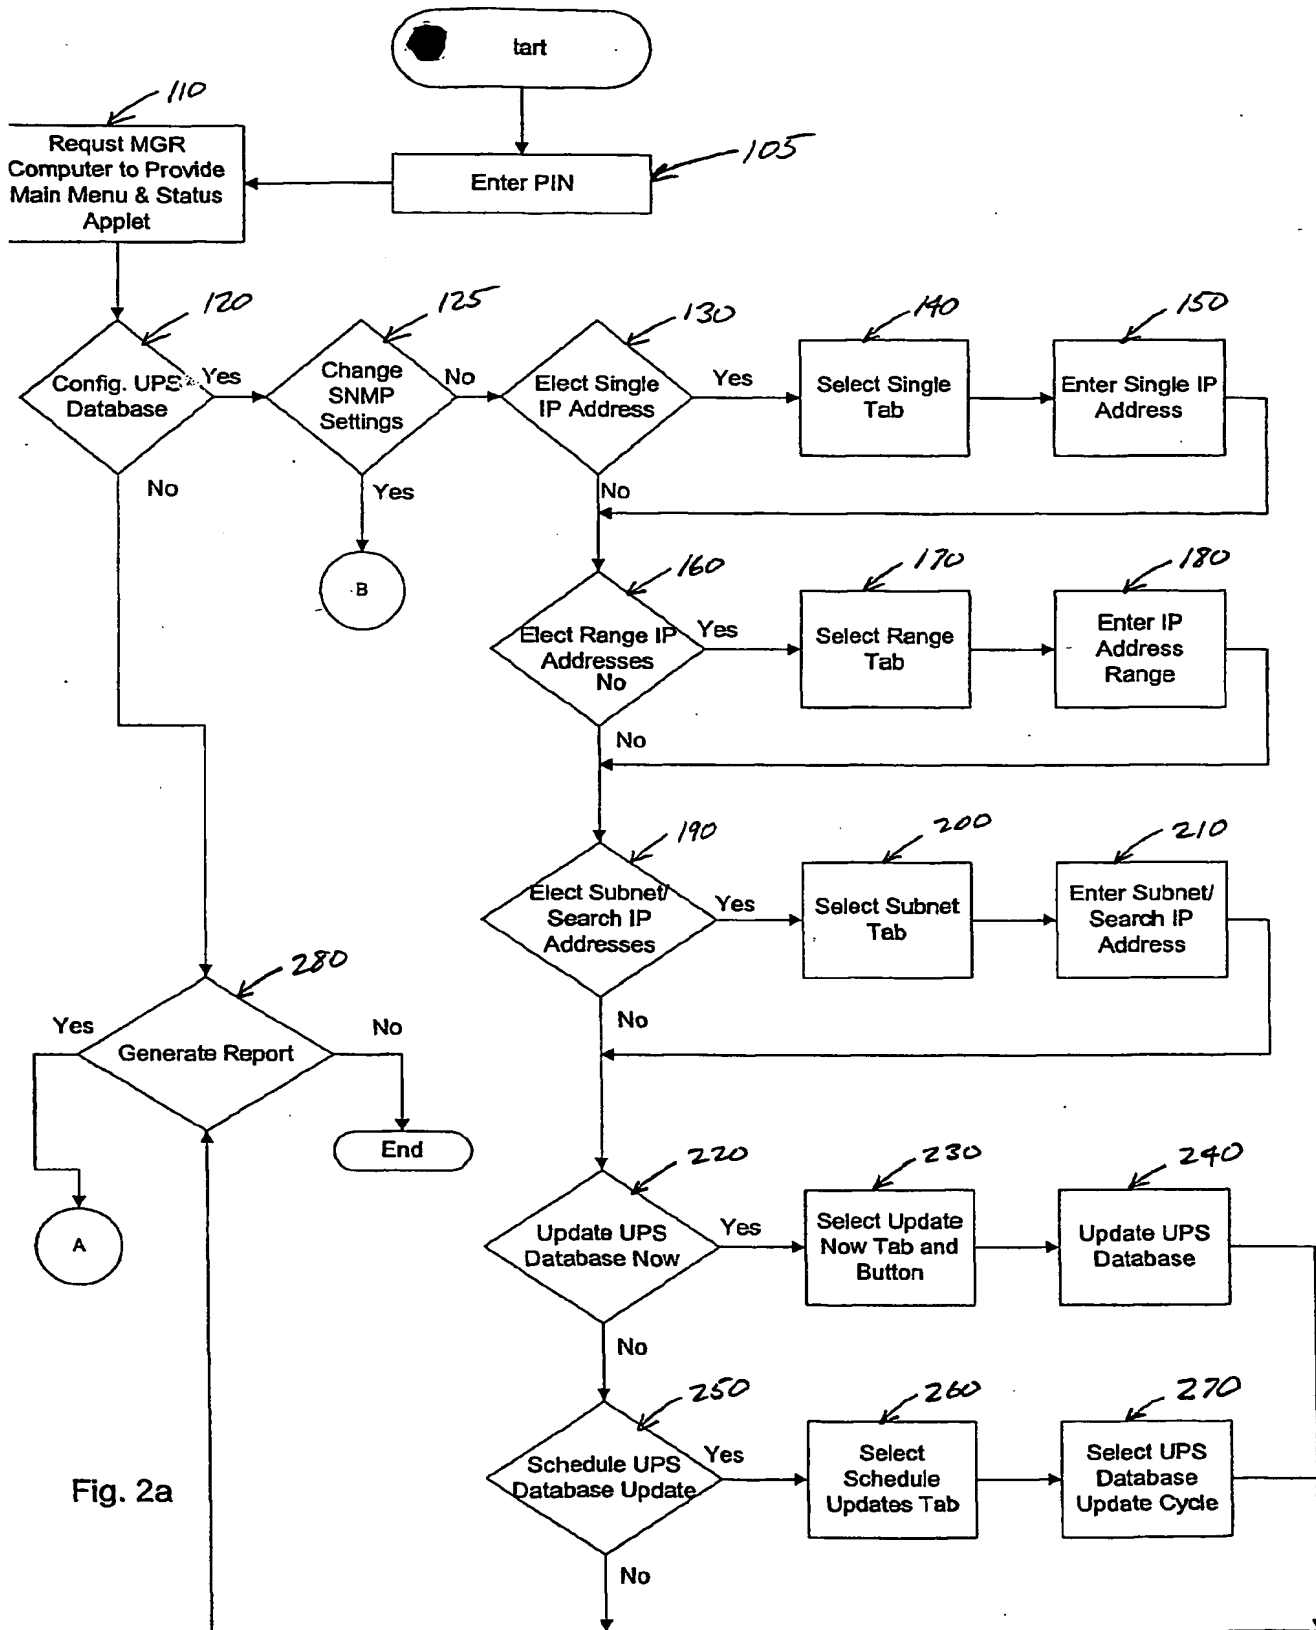


Fig. 2a

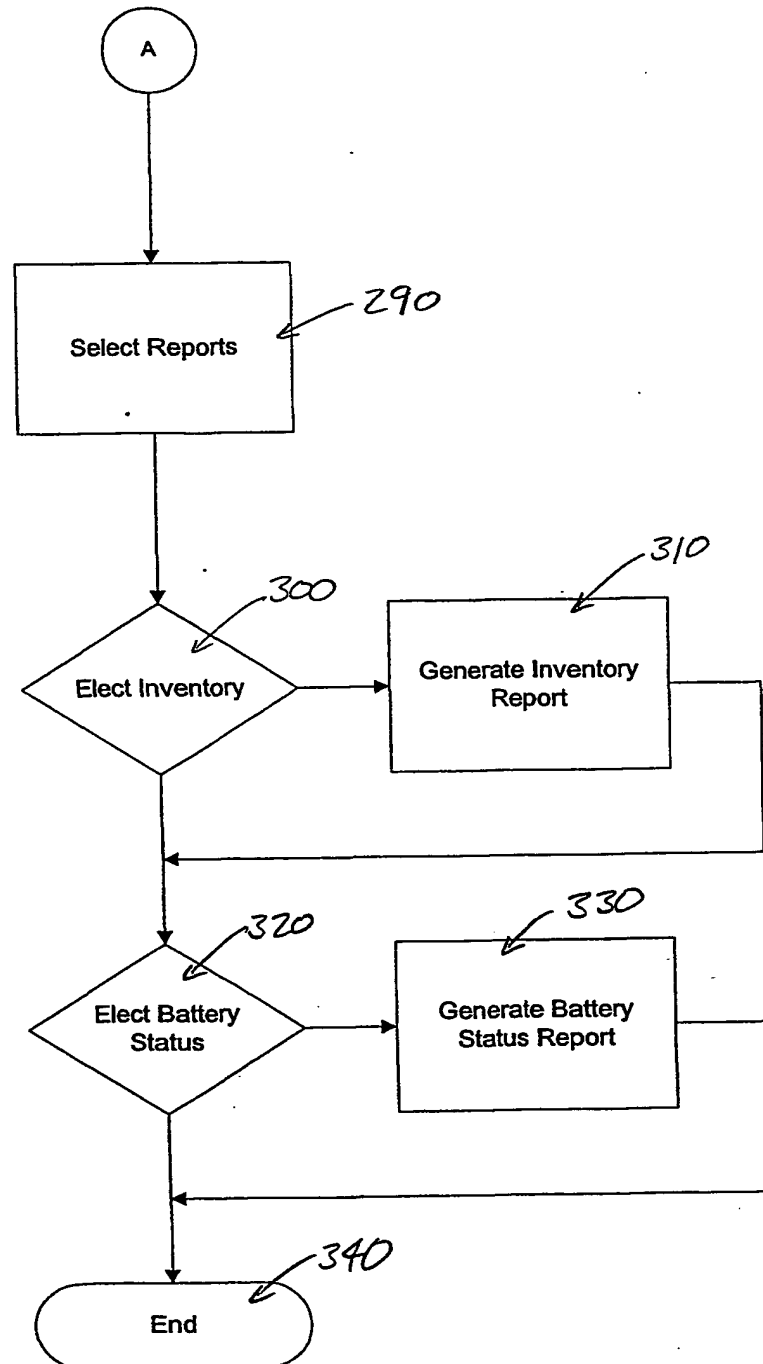


Fig. 2b

BEST AVAILABLE COPY

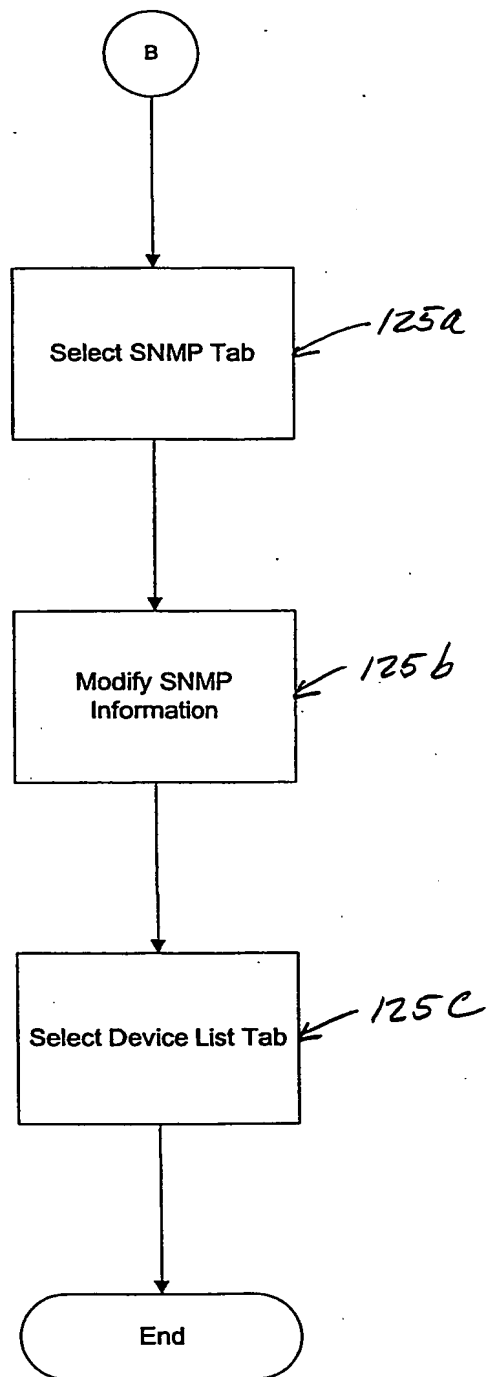


Fig. 2c

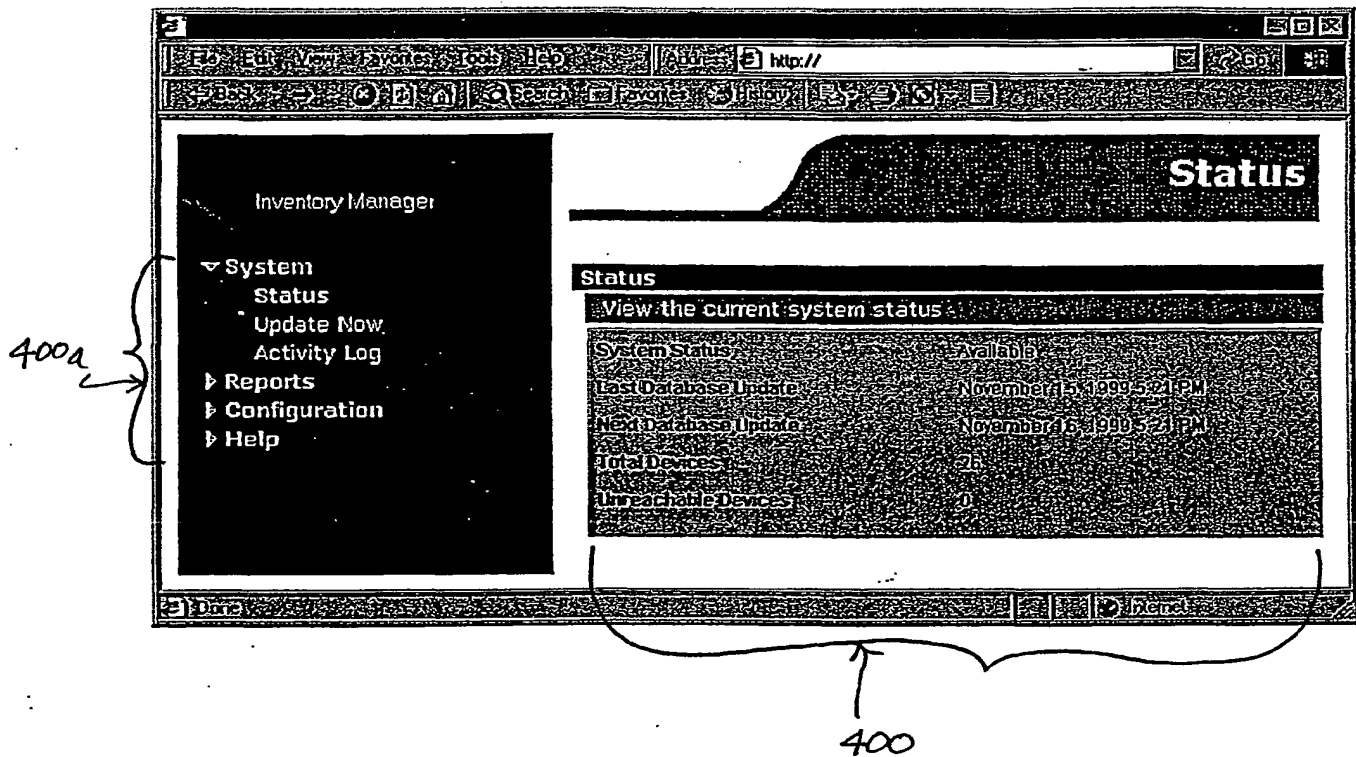


Fig. 3

BEST AVAILABLE COPY

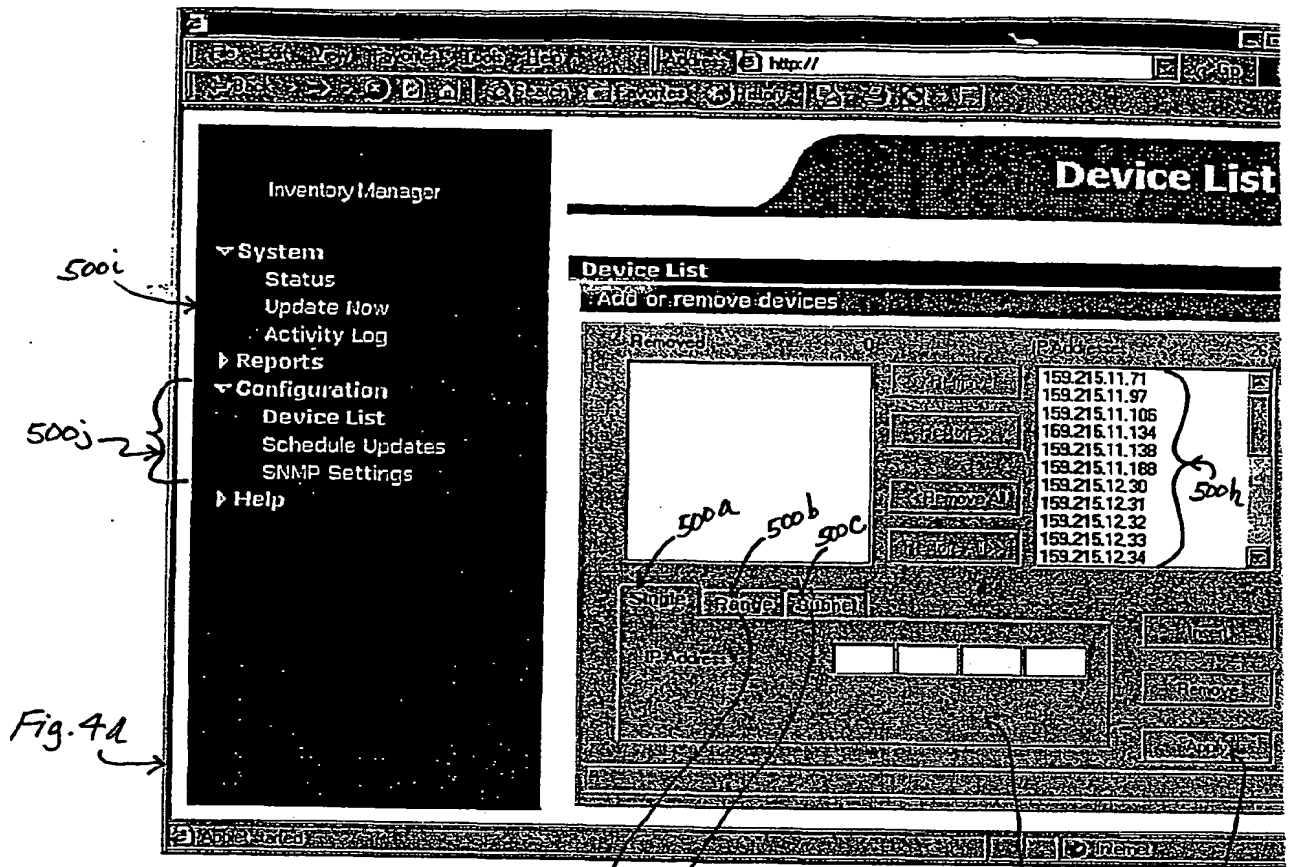


Fig. 4a

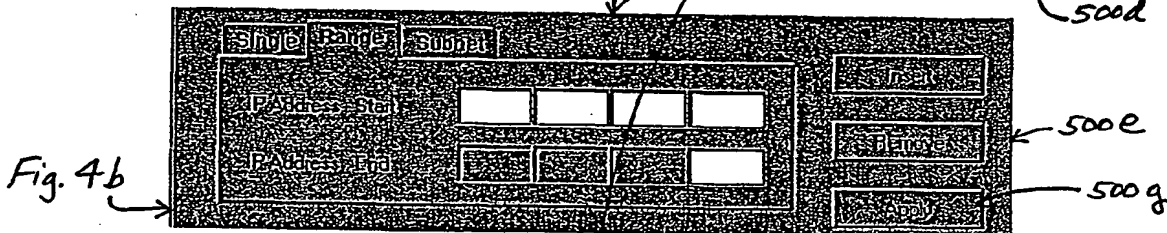


Fig. 4b

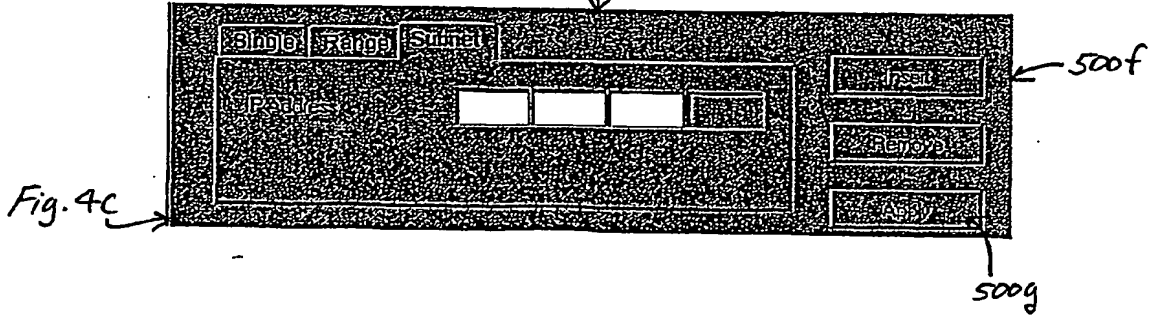


Fig. 4c

500


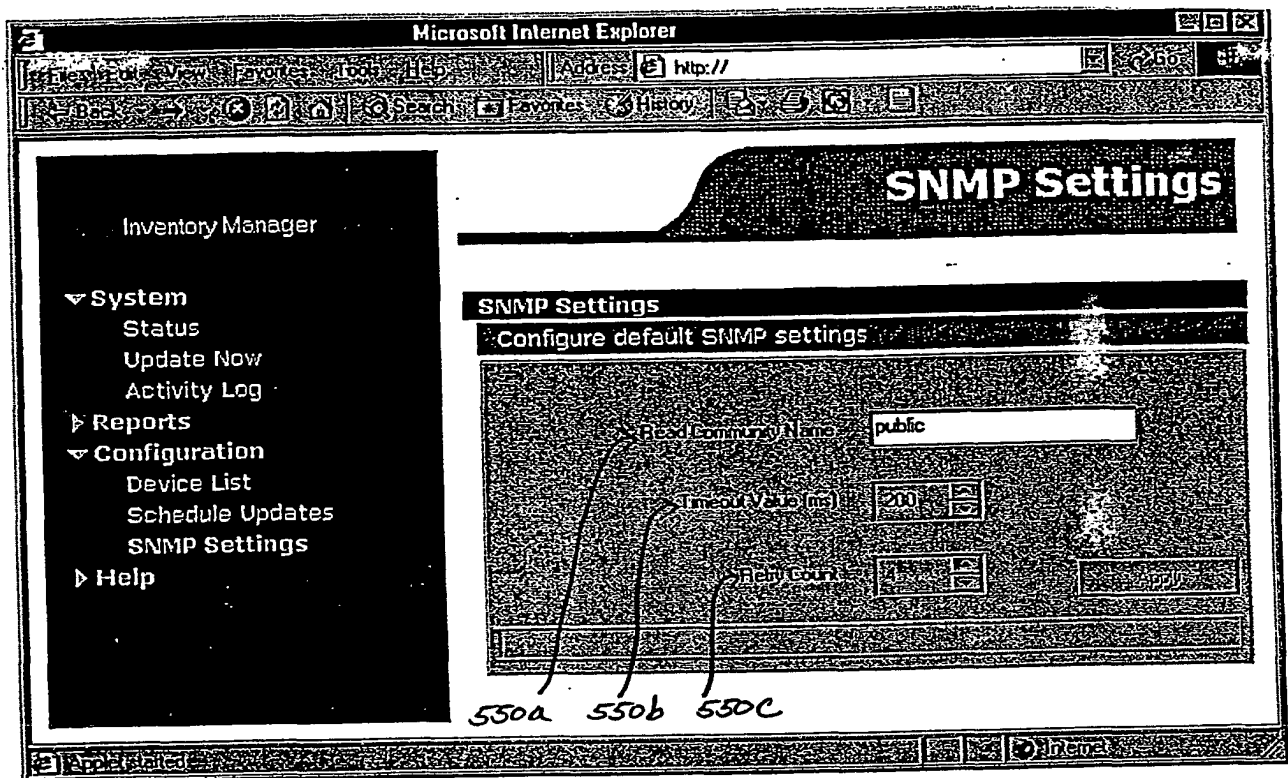


Fig. 4d


BEST AVAILABLE COPY

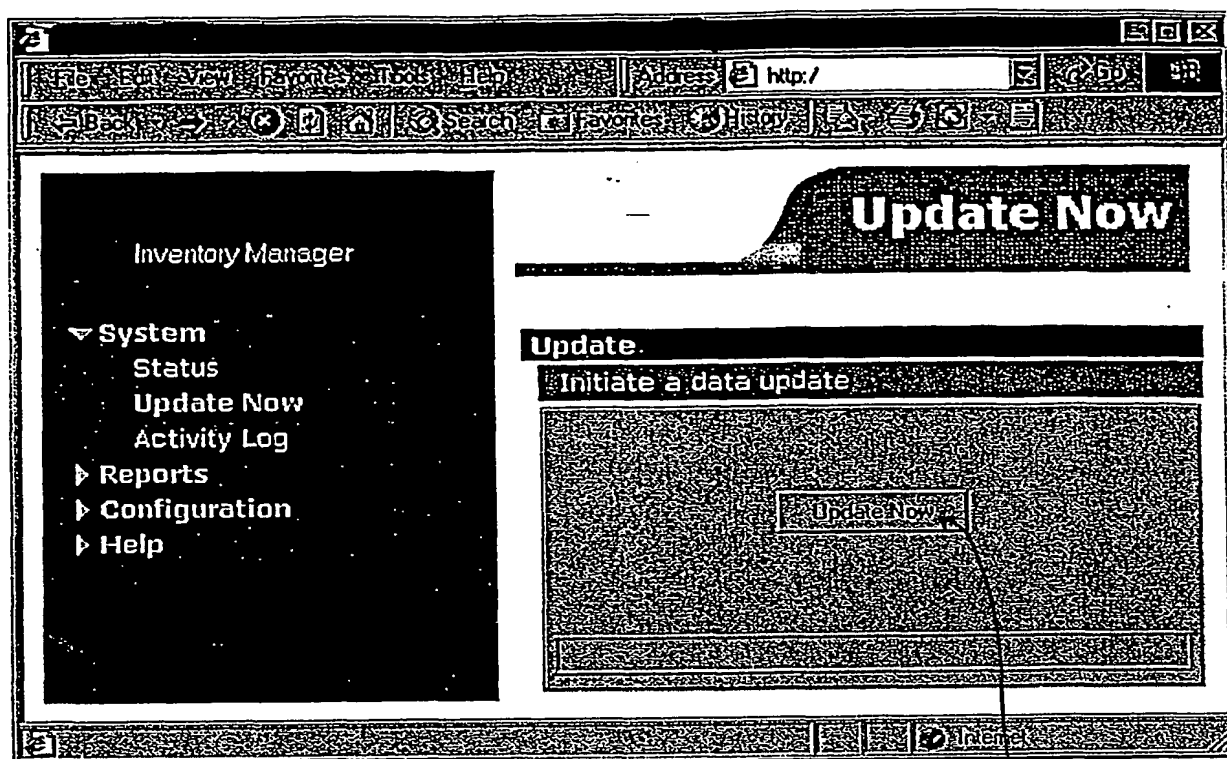

600a

600 ↗

Fig 5

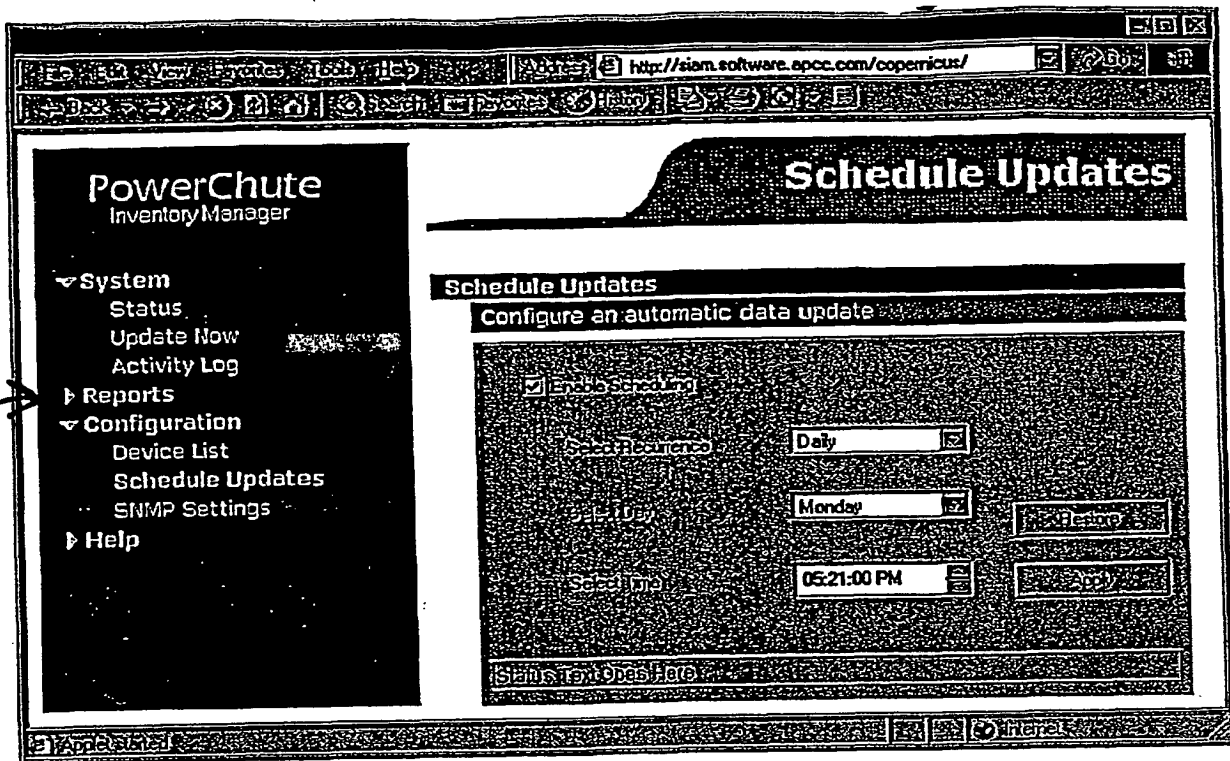

- ▼ Reports
  - ▼ Inventory
    - By UPS Model
    - By Location
    - By IP Address
    - Detail By IP Address
    - By UPS Age
    - By Battery Age
    - By Availability
  - ▼ Battery Status
    - By Self Test Result
    - By Replace Battery Status
    - By Load
    - By Runtime Remaining


700a

700

Fig. 6


BEST AVAILABLE COPY



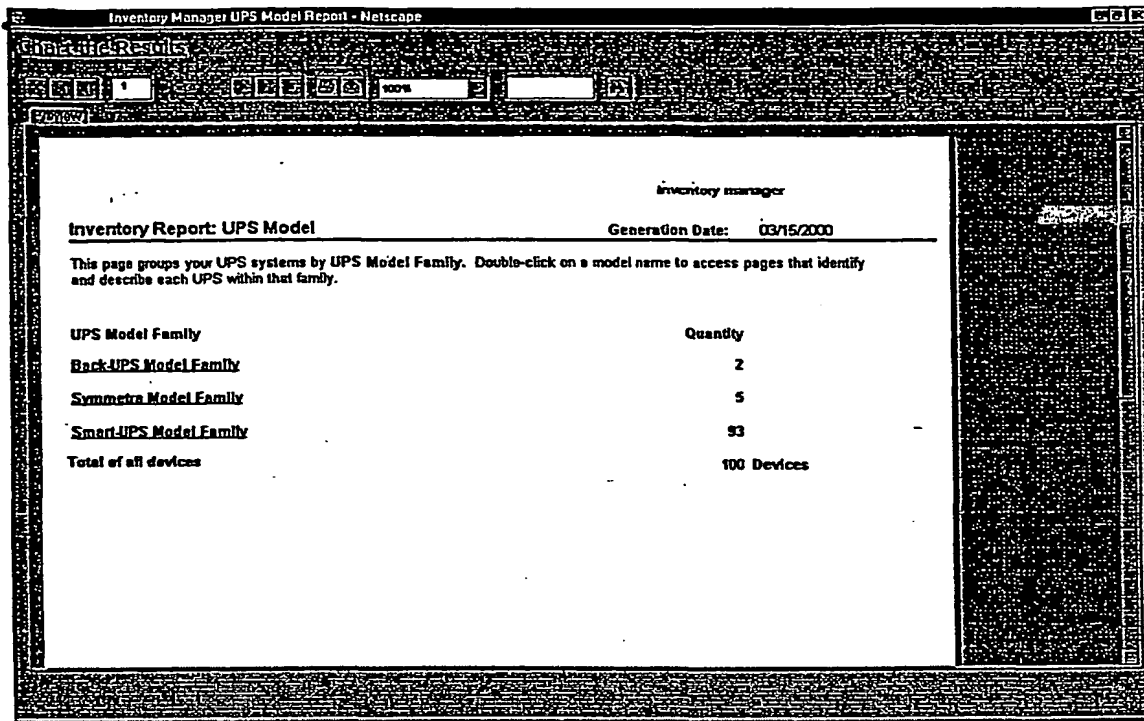

800 ↑

FIG. 7

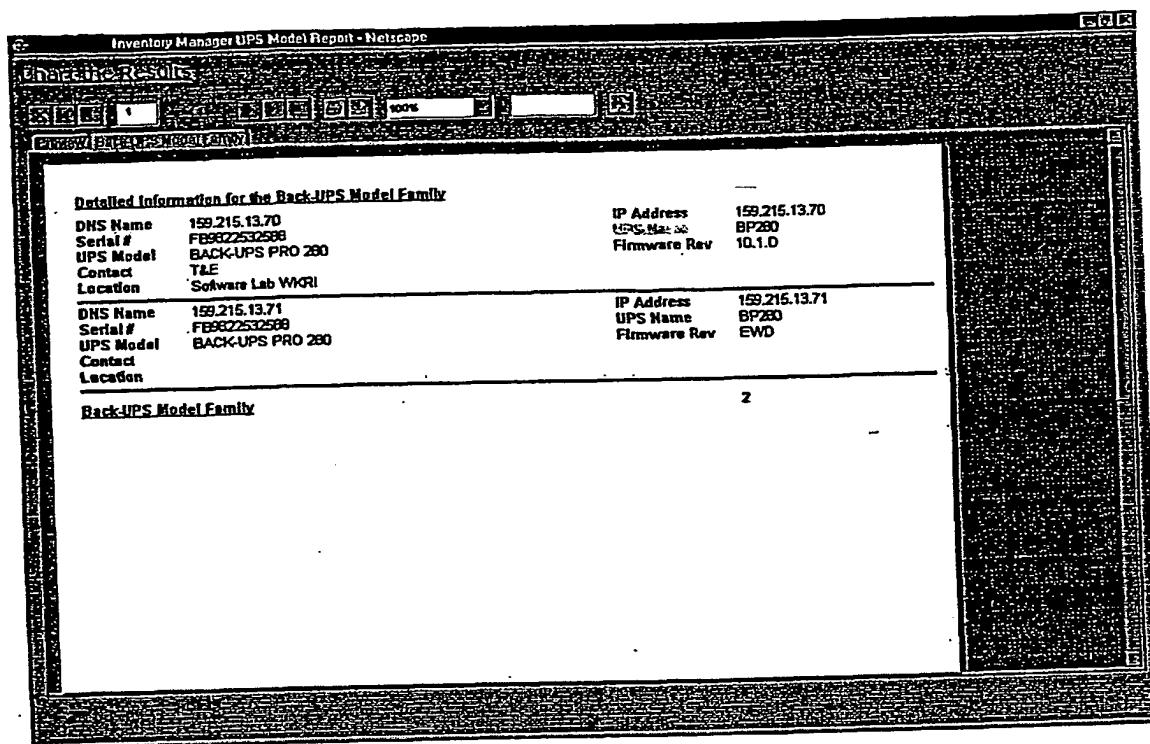


900 ↑

FIG. 8

BEST AVAILABLE COPY

BEST AVAILABLE COPY

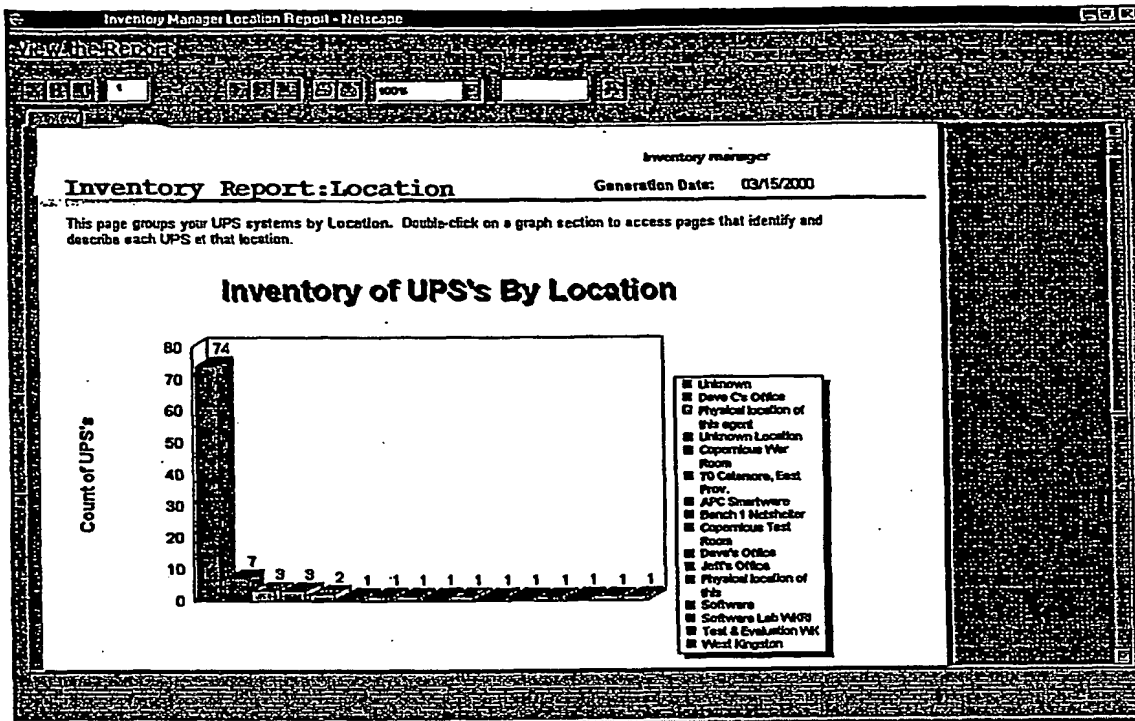

1000 ↑

FIG. 9

Inventory Manager Location Report - Netscape

View the Report

100%

Refresh

Detailed Information for Location: Dave C's Office

DNS Name	159.215.11.138	IP Address	159.215.11.138
Serial #	ws9640566671	UPS Name	Power
UPS Model	Smart-UPS 700	Firmware Rev	50.9.D
Contact	Dave C		
DNS Name	159.215.11.211	IP Address	159.215.11.211
Serial #	10000801134441	UPS Name	UPS_8
UPS Model	SMART-UPS 1400	Firmware Rev	70.9.D
Contact	Dave C		
DNS Name	192.9.237.52	IP Address	192.9.237.52
Serial #	10000801134441	UPS Name	UPS_8
UPS Model	SMART-UPS 1400	Firmware Rev	70.9.D
Contact	Dave C		
DNS Name	192.9.237.53	IP Address	192.9.237.53
Serial #	10000801134441	UPS Name	UPS_8
UPS Model	SMART-UPS 1400	Firmware Rev	70.9.D
Contact	Dave C		
DNS Name	192.9.237.54	IP Address	192.9.237.54
Serial #	10000801134441	UPS Name	UPS_8
UPS Model	SMART-UPS 1400	Firmware Rev	70.9.D
Contact	Dave C		
DNS Name	192.9.237.55	IP Address	192.9.237.55
Serial #	10000801134441	UPS Name	UPS_8
UPS Model	SMART-UPS 1400	Firmware Rev	70.9.D
Contact	Dave C		
DNS Name	192.9.237.55	IP Address	192.9.237.55

1100 ↗

FIG. 10

BEST AVAILABLE COPY

BEST AVAILABLE COPY

Microsoft Internet Explorer

Inventory Report by IP Address  
6/30/99

IP Address	DNS Name (if available)	UPS Model	UPS Name	UPS Serial#	UPS Firm
159.215.1.0	Oyster.software.apoc.com0	SmartUPS 700	DATALOAD	123456	GWD
159.215.1.1	Orca0	BackUPSPro 450	DATALOAD	123456	GWD
159.215.1.2	Flash0	SmartUPS 2200 RMXL	DATALOAD	123456	GWD
159.215.1.3	Mustang.software.apoc.com0	Symmetra	DATALOAD	123456	GWD
159.215.1.4	Specky0	SmartUPS 450	DATALOAD	123456	GWD
159.215.1.5	Barbarosa0	SmartUPS 700	DATALOAD	123456	GWD
159.215.1.6	Batman0	BackUPSPro 450	DATALOAD	123456	GWD
159.215.1.7	Boots0	SmartUPS 2200 RMXL	DATALOAD	123456	GWD
159.215.1.8	Brewmaster0	Symmetra	DATALOAD	123456	GWD
159.215.1.9	Buzzard0	SmartUPS 450	DATALOAD	123456	GWD
159.215.1.10	Condon0	SmartUPS 700	DATALOAD	123456	GWD
159.215.1.11	Dangers0	BackUPSPro 450	DATALOAD	123456	GWD
159.215.1.12	Defiant0	SmartUPS 2200 RMXL	DATALOAD	123456	GWD
159.215.1.13	Elvira0	Symmetra	DATALOAD	123456	GWD
159.215.1.14	Gink0	SmartUPS 450	DATALOAD	123456	GWD
159.215.1.15	Hemlet0	SmartUPS 700	DATALOAD	123456	GWD
159.215.1.16	Integrity0	BackUPSPro 450	DATALOAD	123456	GWD
159.215.1.17	Lafayette0	SmartUPS 2200 RMXL	DATALOAD	123456	GWD
159.215.1.18	Lucy0	Symmetra	DATALOAD	123456	GWD

1200 ↑

FIG. 11

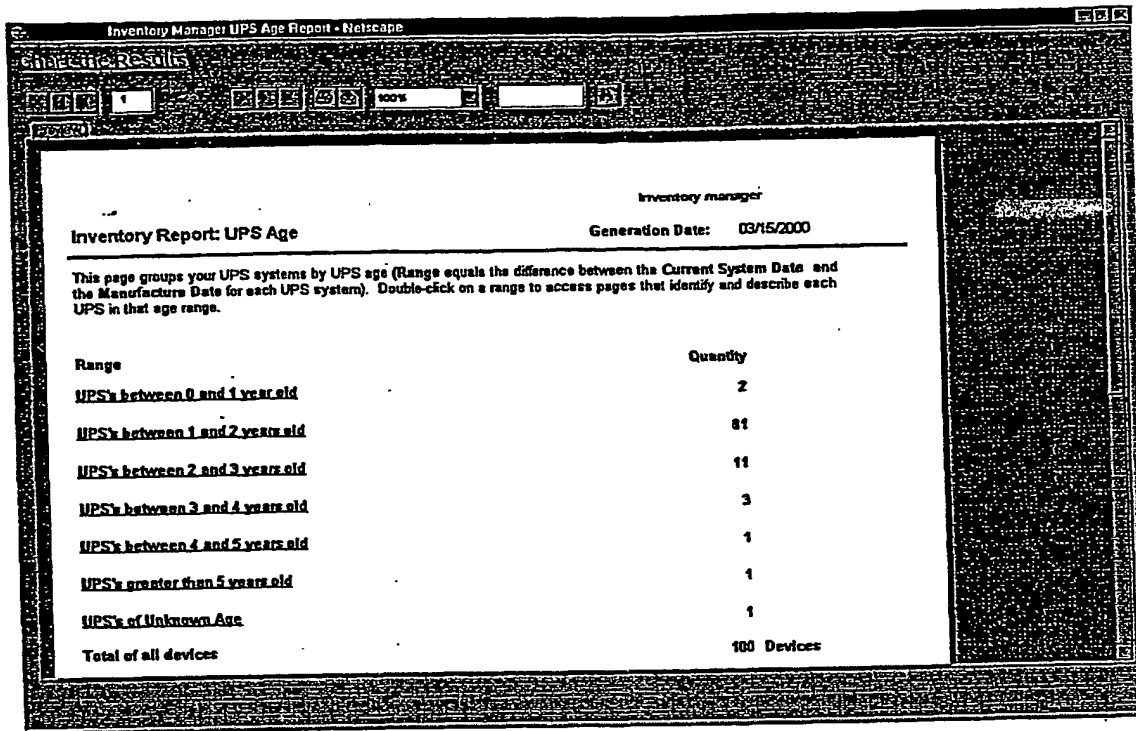


FIG. 12

BEST AVAILABLE COPY

BEST AVAILABLE COPY


Inventory Manager UPS Age Report - Netscape

UPS's between 2 and 3 years old:

UPS Model	SMART-UPS 1000	IP Address	159.215.11.243
Serial#	1010000616616	Battery Last Replaced Date	3/18/1997
Firmware Rev	60.9.D	UPS Manufacture Date	3/18/1997
DNS Name	159.215.11.243		
Contact	Todd Giacinto		
Location	Software		
UPS Model	SMART-UPS 1400	IP Address	159.215.11.211
Serial#	10000801134441	Battery Last Replaced Date	1/13/1998
Firmware Rev	70.9.D	UPS Manufacture Date	1/13/1998
DNS Name	159.215.11.211		
Contact	Dave C.		
Location	Dave C's Office		
UPS Model	SMART-UPS 1400	IP Address	192.9.237.62
Serial#	10000801134441	Battery Last Replaced Date	1/13/1998
Firmware Rev	70.9.D	UPS Manufacture Date	1/13/1998
DNS Name	192.9.237.62		
Contact	Dave C.		
Location	Dave C's Office		
UPS Model	SMART-UPS 1400	IP Address	192.9.237.63
Serial#	10000801134441	Battery Last Replaced Date	1/13/1998
Firmware Rev	70.9.D	UPS Manufacture Date	1/13/1998
DNS Name	192.9.237.63		
Contact	Dave C.		
Location	Dave C's Office		
UPS Model	SMART-UPS 1400	IP Address	192.9.237.64

1400 ↗

FIG. 13

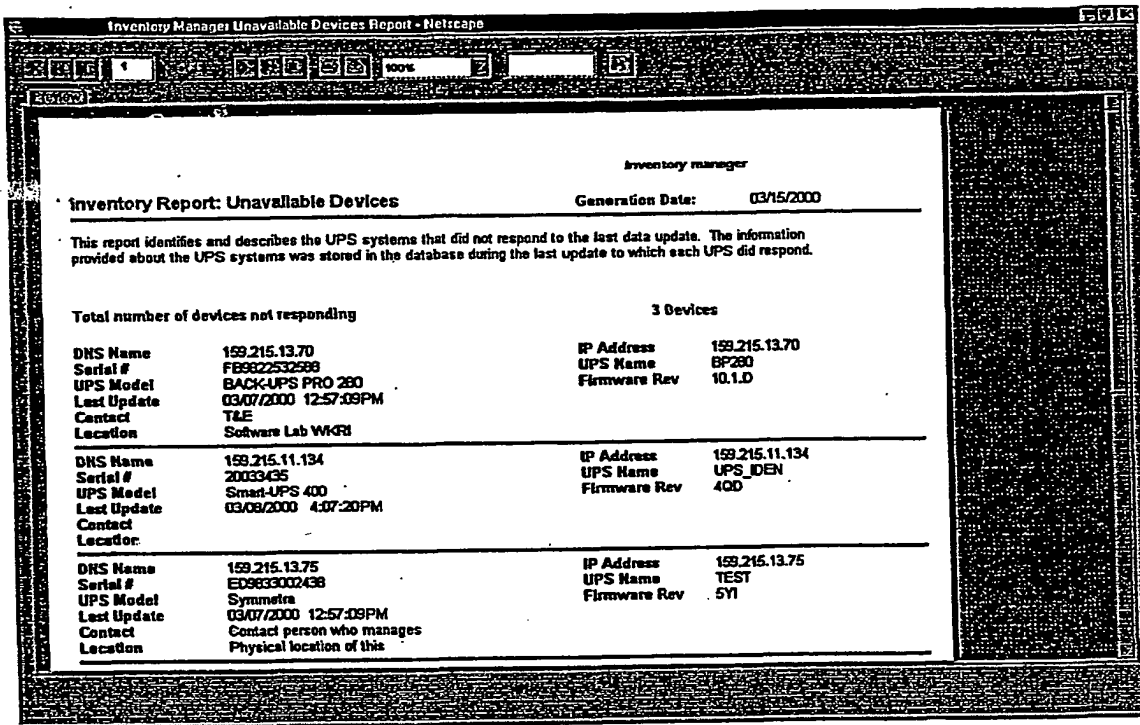


1500 ↑

FIG. 14


BEST AVAILABLE COPY



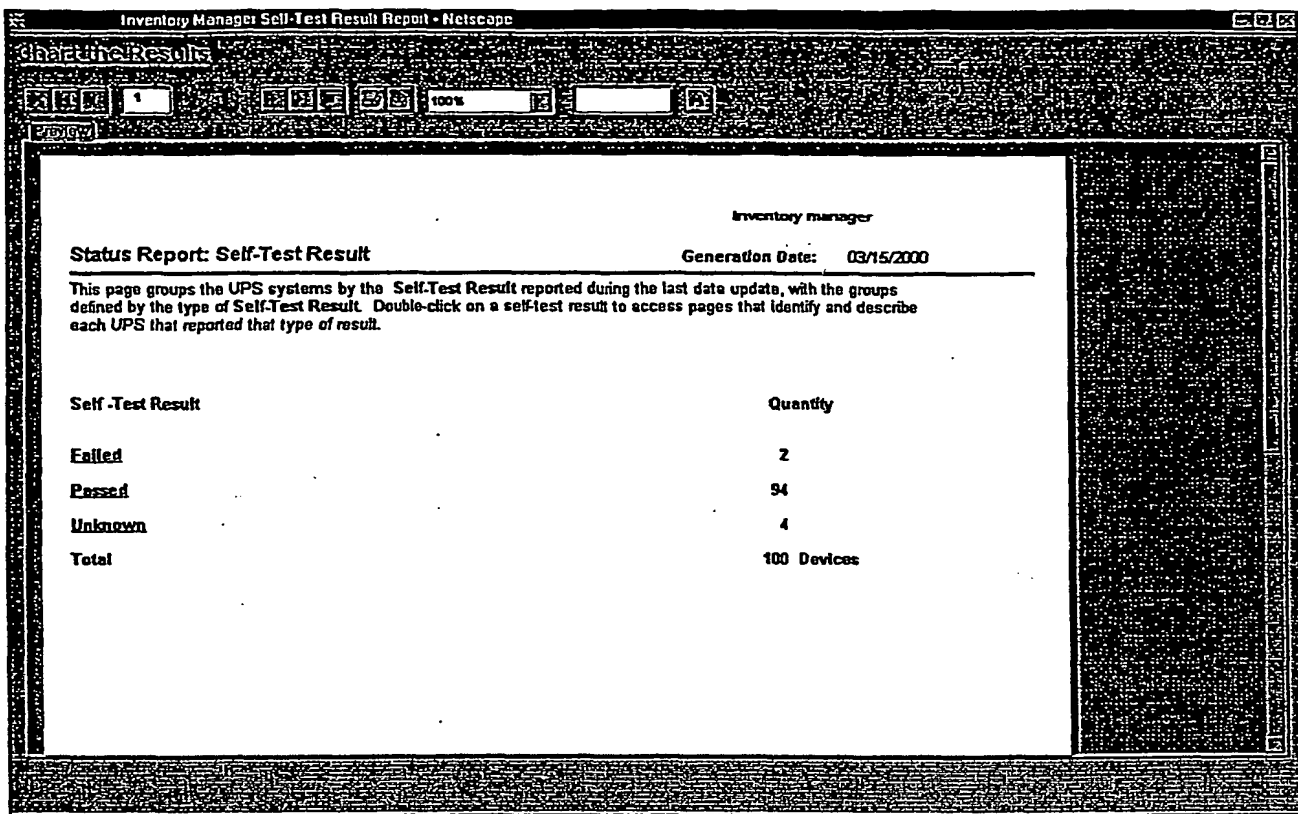

1600 ↑


FIG. 15

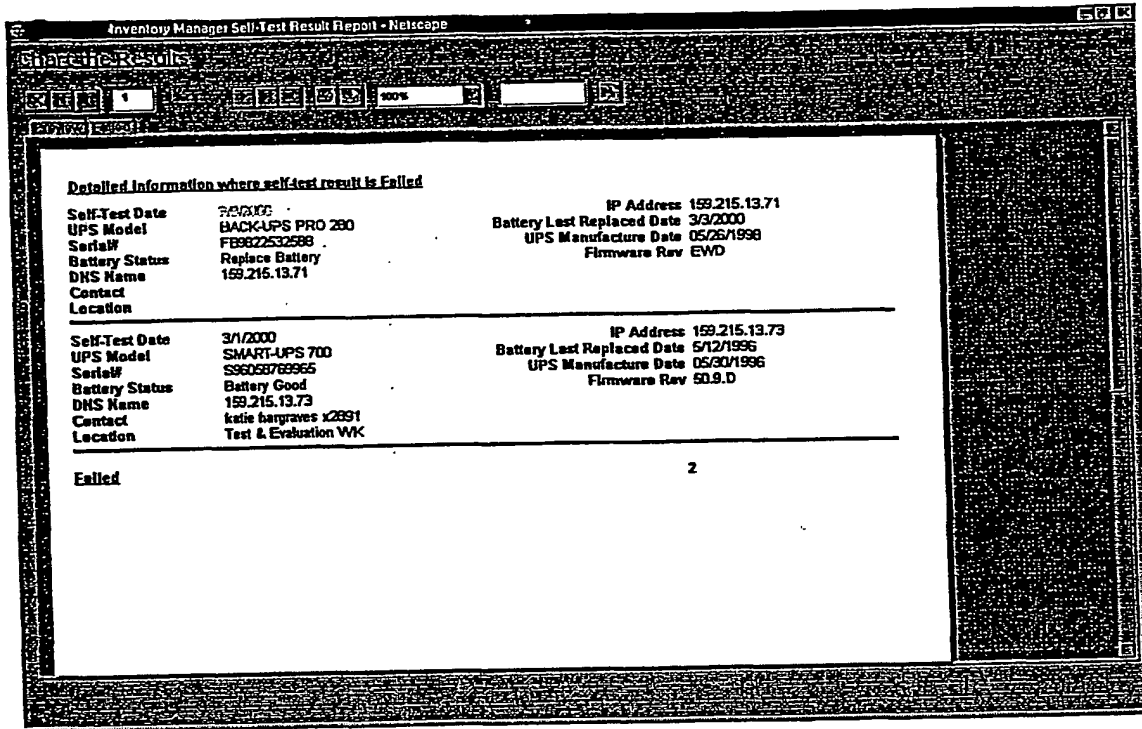

1700 ↗

FIG. 16


BEST AVAILABLE COPY

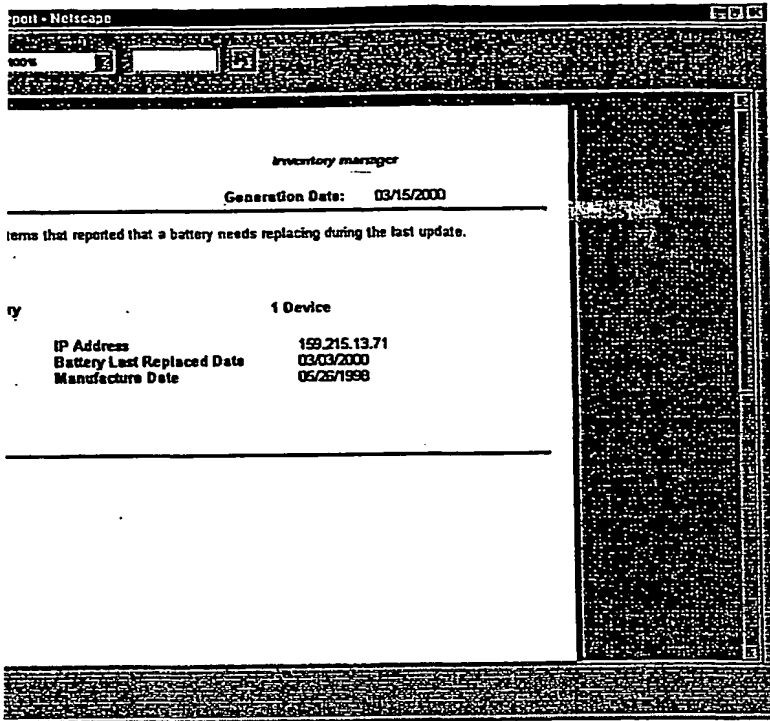

BEST AVAILABLE COPY

1800 ↑

FIG. 17

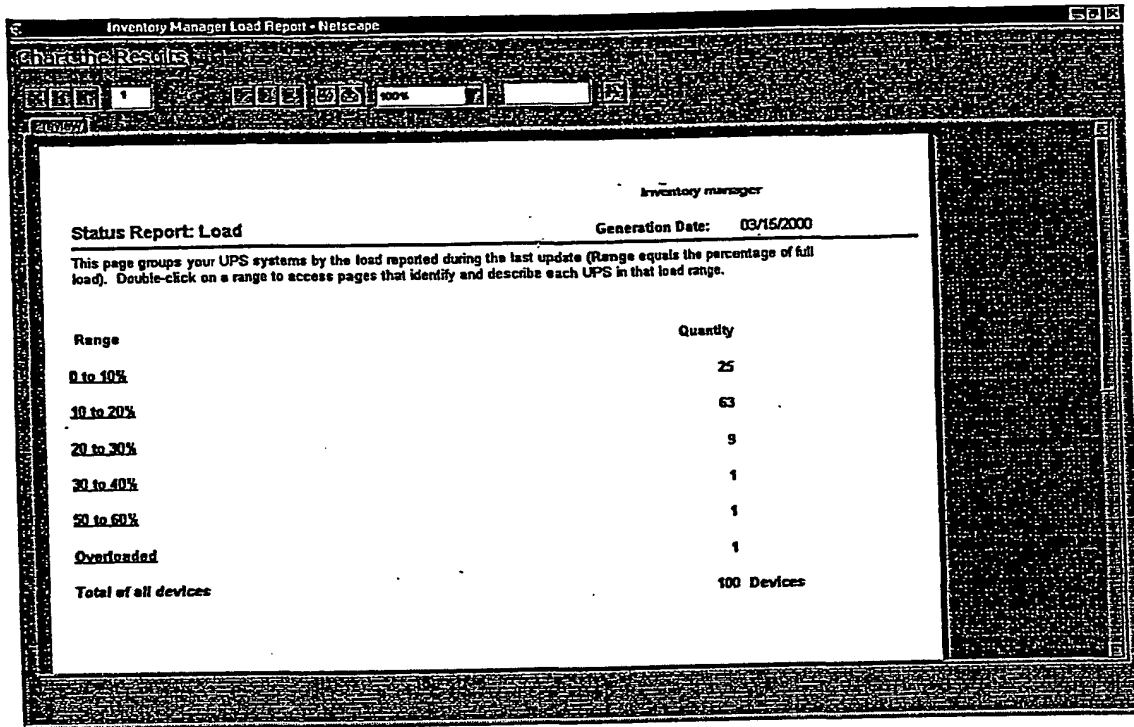

1900 ↗

BEST AVAILABLE COPY

FIG. 18

Inventory Manager Load Report - Netscape


UPS's at 10 to 20 % load

% Load	11.00 %	Runtime	95 minutes
Serial #	NS9651165147	IP Address	192.215.12.33
UPS Model	SMART-UPS 700	UPS Name	UPS_IDEN
Firmware Rev	GWD		
DNS Name	192.215.12.33		
Contact	Unknown		
Location	Unknown		
<hr/>			
% Load	12.00 %	Runtime	89 minutes
Serial #	XSS951013429	IP Address	192.9.237.3
UPS Model	SMART-UPS 1400 RM	UPS Name	UPS_IDEN
Firmware Rev	72.11.D		
DNS Name	192.9.237.3		
Contact	Unknown		
Location	Unknown		
<hr/>			
% Load	12.00 %	Runtime	89 minutes
Serial #	XSS951013429	IP Address	192.9.237.4
UPS Model	SMART-UPS 1400 RM	UPS Name	UPS_IDEN
Firmware Rev	72.11.D		
DNS Name	192.9.237.4		
Contact	Unknown		
Location	Unknown		
<hr/>			
% Load	12.00 %	Runtime	89 minutes
Serial #	XSS951013429	IP Address	192.9.237.5
UPS Model	SMART-UPS 1400 RM	UPS Name	UPS_IDEN
Firmware Rev	72.11.D		
DNS Name	192.9.237.5		
Contact	Unknown		

NOT AVAILABLE COPY

2000 ↗

FIG. 19

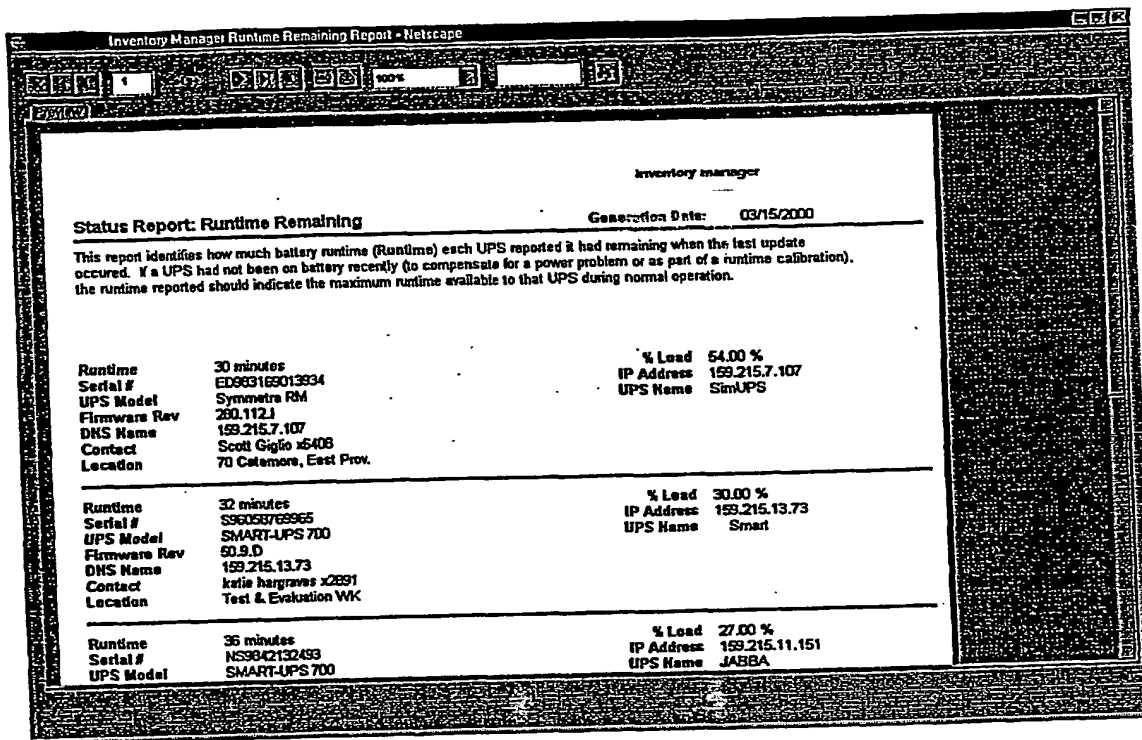

2100 ↗

BEST AVAILABLE COPY

FIG. 20

19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
1 November 2001 (01.11.2001)

PCT

(10) International Publication Number  
WO 01/82260 A3

1) International Patent Classification<sup>7</sup>: H02J 9/00

1) International Application Number: PCT/US01/12766

2) International Filing Date: 19 April 2001 (19.04.2001)

5) Filing Language: English

6) Publication Language: English

0) Priority Data:  
09/559,983 26 April 2000 (26.04.2000) US

1) Applicant: AMERICAN POWER CONVERSION  
[US/US]: 132 Fairgrounds Road, West Kingston, RI 02892 (US).

2) Inventors: HAMMOND, Brad: 104 Hideaway Lane,  
North Kingstown, RI 02852 (US). MEISER, Carl, J.,  
III: 9 Flintstone Court, East Greenwich, RI 02818 (US).

GIAQUINTO, Todd: 50 Cattail Lane, North Kingstown,  
RI 02852 (US). MURPHY, Catherine: Apartment 24306,  
3595 Post Road, Warwick, RI 02886 (US). REDMOND,  
Dan: 23 Church Street, Bradford, RI 02808 (US).

(74) Agent: KLAUZINSKI, Robert, V.; Mintz, Levin, Cohn,  
Ferris Glovsky and Popeo, P.C., One Financial Center,  
Boston, MA 02111 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM,  
HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK,  
LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX,  
MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL,  
TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE).

[Continued on next page]

4) Title: SYSTEM AND METHOD FOR MANAGING UNINTERRUPTIBLE POWER SUPPLY SYSTEMS

4-terminal and Mass-Spec Sequencing of the  
P. acnes proteins Z I&II Proteins

GRQVDPLVCNDASCLQLRAVPDERNPQMKVKFLAAPLVGALM  
START  
APAAFSGATAHAAPVAPIVAVSATQPNKTLVVAEAKKELOVVNA  
N-ter peptide: ZI MS: ZI  
RIASLLDTQKSAKEAFAPANVLNUGKLTETARRIKEALVNVKIG  
ZII  
N-ter peptide: ZII  
GIAFLKSIPTRVELLVTMVDTVNGAAHTLQDKAOPAHSHVFLEL  
MS: ZI & ZII  
VHASVLLTVSATSDQLKDEMAAVKKALAEAKMPDLKPNDVA  
MS: ZI & ZII  
TFYTKTKLSRVLRORFORNTCVLPFKRLGTIYFNSRALLKATG

VLMEPLVRYSEVDQAITDVKAAYQDALKAPNRLTPAVPSVCLP  
MS: ZI & ZII

APAAS

(57) Abstract: An Internet-based system and method is set forth for managing a number of uninterruptible power supply systems. The system includes an uninterruptible power supply manager computer coupled to a number of user computers via a computer network. The manager computer is further coupled to the number of uninterruptible power supply systems via the computer network. The manager computer can communicate with the number of uninterruptible power supply systems to obtain inventory and/or status information related to each of the uninterruptible power supply systems. The inventory and/or status information is contained in a database defined on the manager computer. An inventory engine, which is included in the computer manager, can configure and arrange the inventory and/or status information into a number of reports.

BEST AVAILABLE COPY



IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(88) Date of publication of the international search report:  
14 March 2002

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

BEST AVAILABLE COPY



A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 H02J9/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 H02J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, INSPEC, IBM-TDB, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 98 55934 A (ANDERSON ROBERT P ;ALPHA TECH INC (US); CRAWFORD WILLIAM J (US)) 10 December 1998 (1998-12-10) page 5, paragraphs 1-3 page 6, line 7 -page 8, paragraph 2; figures 4,7,11	1-20
A	M. JARKOWSKI ET AL: "New approach for management services with a Web browser" COMPUTER NETWORKS, vol. 31, no. 21, 10 November 1999 (1999-11-10), pages 2227-2236, XP002185729 Elsevier, Netherlands the whole document --- -/--	1-20

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*G\* document member of the same patent family

Date of the actual completion of the international search

14 December 2001

Date of mailing of the international search report

22/01/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Moyle, J

BEST AVAILABLE COPY

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>DATABASE INSPEC 'Online!  INSTITUTE OF ELECTRICAL ENGINEERS,  STEVENAGE, GB;  DAISHOJI H ET AL: "A compact  uninterruptible power system, SAU series"  Database accession no. 5859337  XP002180283  abstract  &amp; SANKEN TECHNICAL REPORT, NOV. 1997,  SANKEN ELECTRIC CO, JAPAN,  vol. 29, no. 1, pages 33-41,  ISSN: 0285-9815</p>	1-20
A	<p>ANONYMOUS: "A Software Managing Clustered  Multi Vender Uninterruptible Power Supply  on Network"  RESEARCH DISCLOSURE,  vol. 42, no. 419,  1 March 1999 (1999-03-01), XP002180281  Havant, UK, article No. 419103  the whole document</p>	1-20

BEST AVAILABLE COPY

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 01/12766

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9855934 A	10-12-1998	AU 8057198 A	21-12-1998
		US 5961604 A	05-10-1999
		WO 9855934 A1	10-12-1998

BEST AVAILABLE COPY

**THIS PAGE BLANK (USPTO)**